



HS

PATENT
Attorney Docket No. 08364.0017
Customer Number 22,852

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:

Andrew SINCLAIR

Serial No.: 09/858,235

Filed: May 17, 2001

For: METHODS AND APPARATUS
FOR SIMULATING INDUSTRIAL
PROCESSES

)
)
) Group Art Unit: 2123
)
) Examiner: Not Yet Assigned
)
)
)
)

Assistant Commissioner for Patents
Washington, DC 20231

Sir:

CLAIM FOR PRIORITY


Under the provisions of 35 U.S.C. § 119, Applicant hereby claims the benefit of the filing date of British Patent Application No. 0011924.8, filed May 17, 2000, for the above-identified U.S. patent application.

In support of this claim for priority, enclosed is one certified copy of the priority application.

Respectfully submitted,

FINNEGAN, HENDERSON, FARABOW,
GARRETT & DUNNER, L.L.P.

Dated: September 17, 2001

By: 
Ernest F. Chapman
Reg. No. 25,961

EFC/FPD/sci
Enclosures

LAW OFFICES

FINNEGAN, HENDERSON,
FARABOW, GARRETT,
& DUNNER, L.L.P.
1300 I STREET, N. W.
WASHINGTON, DC 20005
202-408-4000



THIS PAGE BLANK (USPTO)



INVESTOR IN PEOPLE

CERTIFIED COPY OF PRIORITY DOCUMENT

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.


In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 18 June 2001

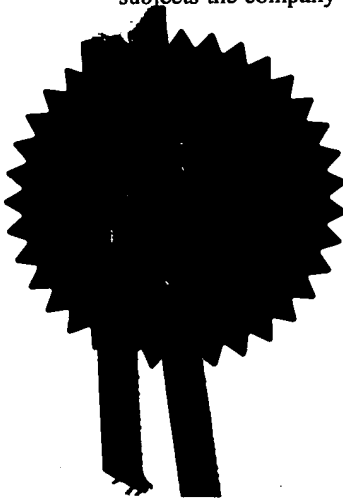


THIS PAGE BLANK (USPTO)

Patents Form 1/77
Patents Act 1977
(Rule 16)

The
Patent
Office

Request for grant of a patent

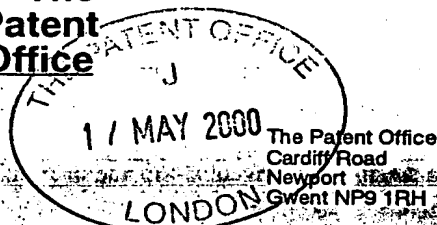

1. Your reference **5321501/NF**

2. Patent Application Number **17 MAY 2000 0011924.8**

3. Full name, address and postcode of the or of each applicant (underline all surnames)

**BioPharm Services Ltd
1 Lexham Gardens
Amersham
Buckinghamshire
HP6 5JP**

Patents ADP number (*if known*) **07899586001**

If the applicant is a corporate body, give the country/state of its incorporation Country: **ENGLAND**
State:

4. Title of the invention

METHODS AND APPARATUS FOR SIMULATING INDUSTRIAL PROCESSES

5. Name of agent **Beresford & Co**

"Address for Service" in the United Kingdom to which all correspondence should be sent **2/5 Warwick Court
High Holborn
London WC1R 5DJ**

Patents ADP number

00001826001

6. Priority details

Country Priority application number Date of filing

Patents Form 1/77

7. If this application is divided or otherwise derived from an earlier UK application give details

Number of earlier application

Date of filing

8. Is a statement of inventorship and or right to grant of a patent required in support of this request?

YES

9. Enter the number of sheets for any of the following items you are filing with this form.

0 Continuation sheets of this form

54 Description

23 Claim(s)

1 Abstract

13 Drawing(s)

10. If you are also filing any of the following, state how many against each item.

0 Priority documents

0 Translations of priority documents

1 Statement of inventorship and right to grant of a patent (*Patents form 7/77*)

1 Request for preliminary examination and search (*Patents Form 9/77*)

0 Request for Substantive Examination (*Patents Form 10/77*)

0 Any other documents (*please specify*)

11. I/We request the grant of a patent on the basis of this application

Signature

Beresford & Co
BERESFORD & Co

Date 17 May 2000

12. Name and daytime telephone number of person to contact in the United Kingdom

FOX; Nicholas

Tel: 020 7831 2290

The
Patent
Office

17 MAY 2000

LONDON

**Statement of inventorship and of
right to grant of a patent**

The Patent Office
Cardiff Road
Newport
Gwent NP9 1RH

-
1. Your reference **5321501/NF**
-
2. Patent Application Number
accompanying application reference 5321501 **17 MAY 2000** **0011924.8**
-
3. Full name of the or each applicant
BioPharm Services Ltd
-
4. Title of the invention
METHODS AND APPARATUS FOR SIMULATING INDUSTRIAL PROCESSES
-
5. State how the applicant(s) derived the right from the inventor(s) to be granted a patent
By virtue of employment.
-
6. How many, if any additional Patents Forms
7/77 are attached to this form?
1 + 1
-
7. I/We believe that the person(s) named over the page (and on any extra copies of this form) is/are the
inventor(s) of the invention which the above patent application relates to.
Signature *Beresford & Co* Date **17 May 2000**
BERESFORD & Co
-
8. Name and daytime telephone number of
person to contact in the United Kingdom **FOX; Nicholas**
Tel: 020 7831 2290
-

Patents Form 7/77

SINCLAIR; Andrew
BioPharm Services Ltd
1 Lexham Gardens
Amersham
Buckinghamshire
HP6 5JP

07899628001

METHODS AND APPARATUS FOR SIMULATING INDUSTRIAL PROCESSES

5 The present invention relates to methods and apparatus
for performing industrial processes in an efficient
manner. In particular, embodiments of the present
invention concern methods and apparatus for designing and
performing industrial microbiological processes, in a
manner in which enables apparatus used in the processes
10 to be used efficiently.

Whenever a production line is in use, it is commercially
important that apparatus is used efficiently to maximise
output. Whilst, the capacity of a production line is
15 ultimately limited by the apparatus available, careful
scheduling of the use of equipment can maximise the
efficiency of a production line once apparatus for the
production line have been selected.

20 Method and apparatus exist to enable industrial processes
to be simulated in order to aid designers designing new
plants and adapting existing plant. The simulation of an
industrial process can enable bottle necks within
production facilities to be identified prior to actual

implementation and thereby enable changes to be made to maximise the use of available equipment.

5 In particular by simulating the timing and processing of batches of materials through a simulated production line, data can be generated which identifies how real batches should be scheduled within an actual production line so that use of equipment is maximised. Furthermore, simulations of industrial processes enable equipment to
10 be selected so that the capacities of different items of equipment complement one another thereby ensuring that in a real production line corresponding to the simulation the use of all items of equipment can be maximised.

15 In productions lines for certain materials, notably microbiological materials and some chemicals, it is important that the total processing time of a batch of material as it passes through a plant between defined hold points is minimised. In the case of biological and
20 microbiological materials this constraint rises due to the limited shelf life of live microbiological materials and their products and the need to ensure that any material produced by a plant is substantially free from other contaminants. Since processing time is of such
25 critical importance, many standard techniques for

maximising the efficiency of equipment within a plant cannot be applied to industrial microbiological processes. In particular, when extracting or purifying microbiological products, batches of product initiated at different times cannot be consolidated into a single batch later on in a manufacturing process other than at defined hold points where a product is stable since the mixing of products gives rise to the possibility that an unacceptable level of contamination might occur.

There is therefore a need for a modelling system which is adapted to address the requirements of industrial processes in which queues and consolidation occurs only at defined points within a process. Such a modelling system can then be utilized to simulate such processes and enables the scheduling of batches and the capacities of equipment to be selected so that the industrial processes corresponding to the simulation can be efficiently performed.

In accordance with one aspect of the present invention there is provided a method of simulating an industrial process comprising the steps of:

for a plurality of items of equipment, determining a respective current cycle time for each said item of equipment;

5 for a batch of product to be processed utilizing said items of equipment, determining a minimum cycle time for each of said items of equipment for processing said batch;

determining the greatest cycle time of said current cycle times for each of said items of equipment, and said
10 minimum cycle times for said batch; and

scheduling the initiation of the batch following the current batch to occur after a period of time corresponding to said determined greatest cycle time.

15 By determining for an industrial process the greatest of the cycle times for items of equipment within a production line and the minimum processing time for a new batch and then scheduling the initiation of a new batch after the determined greatest cycle time, a means is
20 provided to ensure that the processing of a product using equipment having the greatest cycle time is scheduled to occur separately for different batches of products. When an industrial process corresponding to that simulated is performed, the batches of material being processed are
25 then scheduled corresponding to the scheduling within the

model and in this way the mixing of different batches and the formation of queues within a system is avoided.

Although simulation tools are known which enable production lines to be designed or modified so that processes corresponding to those simulated are performed in an efficient manner, such design tools normally only enable the size and timing of simulated batches and the size and capacity of simulated equipment to be varied.

Although the variation of such parameters and simulation of processes enables the size and timing and size and capacity of bathes and equipment on an actual production line to be set to increase the efficiency of a corresponding process other factors can limit the efficiency of an actual production line.

In particular, in many known methods and apparatus for simulating industrial processes, no attempt is made to model support services needed to implement a main process. In general, this is because the demand for external utilities such as water and electricity can be assumed to be such that for most processes, the availability of utilities does not place constraints what processing may be undertaken. However, the applicants

have appreciated that in the case of specialised processes this assumption is not necessarily true.

In particular, where, as is the case of industrial biological processes, many steps involve the use of utilities generated on site such as e.g. purified water, water injection (WFI), clean steam etc., the availability of on site generated utilities can act to limit site output and therefore need to be modelled. The modelling of on-site utilities can then identify the requirements for generation and storage of such specialised utilities or enable processes to be rescheduled or varied to ensure that utility capacity does not limit production efficiency. The resultant data on simulated production lines can then be utilised to select production facilities or schedule processing within a real plant.

Where support services are modelled, it is important that modelling can determine times of the demand so that the peak demand can be determined and controlled if necessary. It is possible to model supply and demand for a utility by way of a continuous model in which the instantaneous demand for a utility is determined. However, where an industrial process is a combination of processing steps only some of which require subsidiary

services, the processing of such a continuous model for the entirety of the system is computationally complex and therefore reduces the speed of the simulation or requires an increase in computer overhead.

5

In accordance with a further aspect of the present invention, there is provided a method of simulating an industrial process comprising the steps of:

10

classifying for each of a plurality of process steps in a process to be modelled, a first group of process steps whose processing is dependent upon utilities which are to be modelled, and a second group of process steps whose processing is not dependent upon utilities which are to be modelled;

15

associating with all of said process steps a completion condition for completing each said process step and data indicative of whether each said process step is currently active;

20

associating with each of said process steps in said second group, rate data indicative of the rate of utility use of a utility for a predetermined time period to be modelled as part of said process steps; and

25

step wise modelling said industrial process and said utilities using said rate data, wherein said each modelling step comprises the steps of:

determining whether any active process steps to be modelled are associated with rate data;

determining the shortest time period required to fulfil the completion condition associated with any active process step; and

updating a model of said industrial process utilizing said predetermined time period if at least one active process is associated with rate data and said predetermined period is smaller than said determined period; and updating said model utilizing said determined time period if no active processes are associated with rate data or said determined time period is shorter than said predetermined period.

Further aspects and embodiments of the present invention will become apparent with reference to the accompanying description and drawings in which:

Figure 1 is a block diagram of an exemplary industrial process;

Figure 2 is a block diagram of an apparatus embodying the present invention;

Figure 3 is a block diagram of modelling data;

Figure 4 is a block diagram of an exemplary data structure for an equipment record;

5 Figure 5 is a block diagram of an exemplary data structure for a discrete process record;

Figure 6 is a block diagram of an exemplary data structure for a continuous process record;

10 Figure 7 is a block diagram of an exemplary data structure for an output process record;

Figure 8 is an exemplary block diagram of an exemplary data structure for a utility record;

15 Figure 9 is a block diagram of an exemplary data structure for batch data;

20 Figure 10 is a block diagram of an exemplary data structure for a batch record;

Figure 11 is a block diagram of an exemplary data structure for output data;

Figure 12 is an exemplary graphical interface for inputting equipment data;

5 Figure 13 is a flow diagram of the processing of a modelling module in accordance with the present invention;

10 Figure 14 is a flow diagram of the processing of a modelling module determining a time increment; and

Figure 15A, 15B and 15C are a flow diagram of the processing of a modelling module updating model data.

15 The present application concerns the design and implementation of industrial processes. In particular, in one aspect the present application concerns the design and implementation of industrial processes in which bottlenecks and delays due to lack of resources can be reduced and equipment is efficiently used.

20

In accordance with an embodiment of the present invention, initially a model corresponding to a process to be implemented is created, utilizing input batch parameters and equipment parameters. A simulation of the process is then effected. In the simulation, the use of

25

equipment, processing of batches and demand for resources are determined within the simulation and an appropriate schedule for timing of the initiation of batches is calculated. After a number of simulations have been run
5 an industrial process corresponding to a simulated process is then be implemented by providing equipment corresponding to the simulated equipment parameters and processing actual batches corresponding to simulated batches in accordance with the generated schedule for the
10 initiation of batches corresponding to the simulation which output data indicates will run efficiently.

An illustrative example of a process which can be modelled utilizing the present invention will now be
15 described with reference to Figure 1.

In this example an illustrative process for generating biological material is shown comprising a fermentation process 20 which causes a biological material to be grown
20 followed by an extraction process 21, a purification process 22 and a formulation process 23 which results in an output being the desired biological material. These processes 20-23 in this example occur using different equipment. The fermentation process 20, the extraction
25 process 21, purification process 22 and formulation

process 23 all result in the generation of waste which needs to be processed by means of waste management process 27.

5 In this example, the fermentation process 20, the
extraction process 21, purification process 22 and
formulation process 23 and the waste management process
27 all require support services. These support services
comprise external utilities 28 such as electricity for
10 heating products, on-site utilities 29 such as purified
water, water suitable for injection (WFI) which needs to
be generated and raw materials 30 such as media
components for fermentation and raw chemicals used in
purification which can be mixed with on-site generated
15 utilities such as generated water for injection (WFI) to
make the media used in fermentation and buffers used in
purification. Cleaning solutions for cleaning the
equipment used to perform the fermentation process 20,
the extraction process 21, purification process 23 and
20 formulation process 23 so that the equipment used in
those steps may be used to create further batches of
biological material is also generated from raw cleaning
chemicals and purified water. Alternatively steam
sterilisation is used using on-site purified water to

prepare production equipment for processing a further batch of material.

5 In order to arrange the scheduling of batches through the processes 20-23 and select equipment for performing the processes 20-23, in a way in which use and speed of precessing is increased, initially the processes are modelled in a manner which will be described in detail later.

10 In order to model the processing of batches of material as they pass through the fermentation process 20, the extraction process 21, the purification process 22 and the formulation process 23 it can be sufficient that
15 external utilities such as electricity and mains water are considered to be continuously available. However, for specialised utilities such as water for injection or cleaning solutions utilizing water for injection, availability of these cleaning solutions or any other on-
20 site utilities may limit processing rates. Therefore, for a more complete model the demands for these on-site utilities are also modelled so that appropriate equipment for generating and storing such utilities can be determined.

The timing of demands for external utilities 28, on-site utilities 29 and raw materials 30 is determined by the manner in which batches of products are scheduled for processing through the fermentation process 20, the extraction process 21, the purification process 22 and the formulation process 23. In the case of biological materials in addition to constraints on the basis of availability of on-site utilities 29 and the availability of equipment for performing fermentation, extraction, purification and formulation, a further constraint on how production of material is scheduled arises due to the need to ensure that no mixing of different batches occurs during fermentation and consolidation of batches only occurs at defined hold points in the purification stages so that any excessive build up of impurities within the biological product is avoided. Thus in this example, this would require that whenever a new batch was to be processed by the fermentation process 20, the equipment for processing the next batch was available for use. However, the rate at which batches progress through the process is also dependent on availability and demand for on-site utilities 29. It therefore necessary to establish a suitable schedule for initiating new batches.

This constraint is also modelled within the simulation of the processes.

Thus by providing apparatus for simulating the processes
5 20-23 in accordance with input data defining the batches
of material and capacities of equipment utilised to
implement the processes 20-23, a means is provided by
which the effect of varying batches and equipment within
the actual processes can be determined. In particular,
10 by utilizing a number of different sets of input data and
outputting for each simulation data identifying the use
of equipment and quantities of utilities used a means is
provided to enable the selection of appropriate equipment
to effect the process modelled.

15 Apparatus for generating data identifying the use of
equipment and quantities of utilities for modelled
processes utilizing equipment corresponding to defined
input parameters in accordance with an embodiment of the
20 present invention will now be described.

Figure 2 is a block diagram of a computer apparatus
embodying the present invention. The computer apparatus
comprises a conventional computer 1 that is connected to
25 a display 3, a keyboard 5 and a mouse 7. The computer 1

is also connected to a printer 8 and a disc drive 9. The disc drive 9 is arranged to receive a disc 10 having a computer program stored thereon which causes a copy of the computer program to be stored within the memory 11 of the computer 1.

In this embodiment the computer program stored within the memory 11 comprises an input module 15 for inputting data representative of a model of an industrial process; and a modelling module 17 for simulating the processing of products through a process utilizing the model data input using the input module 15. The memory 11 also is arranged to store modelling data 19 being data input utilizing the input module 15 and data generated by the modelling module 17.

In use, after the input module 15 and modelling module 17 have been stored in memory 11, a user inputs model data using the input module 15, the keyboard 5 and the mouse 7. Data input via the keyboard 5, mouse 7 is then processed by the input module 15 and stored as modelling data 19. An industrial process can then be simulated using the modelling data 19 in accordance with the modelling module 17. Generated output data is then stored within the memory 11 and after the simulation has

been completed results are displayed on the display 3. The generated output data can then be printed out in hard copy format by the printer 8.

5 The modelling in accordance with the present invention is such to enable support services such as on site utilities and waste processing and production rules to be modelled. In particular, the present invention enables continuous models of utilities identifying instantaneous demand for
10 utilities to be incorporated within discrete models of other processes. This is achieved by the modelling module 17 determining for each step within a model, firstly whether any continuous processes are to be modelled and then utilizing a suitable time increment for
15 the model by selecting the smaller time increment of either the minimum time required to complete an active process or a default time increment. If no continuous processes are determined to be active the minimum time required to complete an active process is used as a time
20 increment.

Thus in this way, whenever only discrete processes i.e. processes not modelling instantaneous demand for a utility are being modelled, time periods corresponding to
25 the minimum time periods to complete processes are used

so that the total number of steps involved in a model is minimised. However, a default time period is used to break down processes which are to be modelled as continuous processes into a number of steps so that an approximation of instantaneous demand for utilities may be determined.

Furthermore, in this embodiment of the present invention a system is provided for simulating and modelling the scheduling the initiation of batches within a model to comply with the constraints of an industrial process in which mixing of batches is avoided. In this embodiment, this is achieved by determining whenever a batch is initialised within specified portions of a simulation where queuing and consolidation constraints arise, a time period for initiating the next batch which corresponds to the longest cycle period for any item of equipment utilized in the process modelled. This longest cycle period is either selected from the current times for equipment currently in use or from estimates of the minimum cycle times for the next batch. Thus in this way a means is provided for ensuring that within the simulation no batches ever are mixed and queues within the model are minimised during the simulation of

fermentation stages and limits consolidation to defined hold points in the purification stages.

Exemplary data structures for storing modelling data 19 in accordance with this embodiment of the present invention will now be described with reference to Figures 3 to 11.

Figure 3 is a block diagram of modelling data 19 stored within the memory 11 of the computer 1. The modelling data 19 comprises data input via the input module 15 defining processes and equipment to be modelled together with data generated by the modelling module 17 utilizing the input data.

In this embodiment the modelling data 19 comprises a plurality of equipment records 31 defining the manner in which products can be processed by a plurality of items of equipment to be simulated; a plurality of utilities 32 records utilized to simulate the generation and use of each of a plurality of on-site utilities; batch data 34 comprising data defining the parameters of batches of product as they pass through an industrial process and data defining how the batches are to be scheduled to ensure that no mixing of different batches occurs as will

be described in detail later; and a plurality of output records 36 comprising data indicating the times at which individual items of equipment defined by the equipment records 31 are in use and the available levels of generated utility identified by the utilities records 32 at any time throughout the simulation.

In this embodiment the equipment records 31 comprise a plurality of records each defining an item of equipment in terms of physical parameters for the equipment and the different processes which take place using that equipment. Thus for example a chromatography column for purifying a component of interest, in this embodiment is defined in terms of physical parameters such as volume and circumference, and a plurality of processes such as packing, loading, elution and cleaning which are undertaken using the equipment.

Also stored as part of an equipment record is status data indicative of whether as part of the simulation the equipment is in use and cycle time data indicating the total amount of time an item of equipment has been processing an individual batch and the time previously taken to process a batch become available for the processing of the next batch which is used to determine

scheduling data for batches which avoids the build up of queues within the system as will be described in detail later.

5 Exemplary data structures for the equipment records 31, utilities records 32, batch data 34 and output data 36 will now be described in detail with reference to Figures 4 to 11.

10 Figure 4 is a block diagram of an exemplary data structure for an equipment record. In this embodiment the equipment records each comprise equipment identification data 50; equipment type data 52 indicative of an equipment type e.g. a chromatography column, a
15 holding vessel etc, status data 54 identifying whether the equipment is in use at a certain time within a simulation, a number of physical parameters 55 for example volume and circumference, a number of discrete process records 60 and a number of continuous process
20 records 62 identifying the processes which are undertaken using the equipment as will be described later; an output process record 64, current cycle time data 66 and previous cycle time data 68 which is used for determining the scheduling of batches of products within the
25 simulation as will be described in detail later.

The equipment identification data 50 enables an item of equipment to be identified so that its usage within the model may be monitored. The equipment identification data 50 also enables batches of products to be routed to specific pieces of equipment within a model. The equipment type data 52 identifies the sort of equipment that is intended to be modelled and enables batches of products to be routed to equipment of a specific type rather than to a specific item of equipment. Thus for example where a product is to be temporarily stored in a suitable holding vessel any available vessel might be used to store the product. Therefore, in a model of such a process a batch would be directed to an item of equipment associated with equipment type holding vessel, rather than a predefined item of equipment.

Figure 5 is a schematic block diagram of an exemplary data structure for a discrete process record 60 in accordance with this embodiment of the present invention.

The discrete process records each comprise process identification data 69, an active flag 70 indicating when within the model the process is taking place; time active data 72 indicating the total amount of time a process has been active; a completion condition 74 comprising data indicative of what conditions must occur within the model

in order for the process modelled by the discrete process record to be considered to be complete; a set of one or more required inputs 76, and a next action field 80 identifying which processes in terms of process ID numbers 69 follow a further completion of the process simulated by the record or alternatively a null field indicating that the processing of an item of equipment is to end.

The completion condition 74 defines the conditions which must be fulfilled in order for the process to be considered complete. A simple example of a completion condition would be for the time active 72 for the process to be equal to a certain value. This would be a suitable completion condition 74 for a process having a fixed time span. More complicated completion conditions could comprise requirements for the time active 72 to be equal to a value calculated on the basis of batch parameters or physical parameters 55 for an item of equipment. The input data 76 defines the inputs necessary to be available in order for a discrete process to be initiated as will be described later.

Figure 6 is a schematic block diagram of a data structure for a continuous process record. In this embodiment, the

data structure for a continuous process record 62 is identical to the data structure for a discrete process record 60 and description of the data structure will be repeated except a continuous process record additionally includes rate determination data 82. The rate determination data 82 comprises data for converting a continuous model of a process defined in terms of rates of usage of utilities into data suitable for use with a discrete model and in this embodiment comprises data identifying the rate at which a utility is used which can be multiplied by a time increment to determine how much of a utility is used within a specified time period, as will be described in detail later.

Figure 7 is a schematic block diagram of an exemplary data structure for an output process record 64. An output process record comprises a record indicative of a process where a batch of materials is transferred from one item of equipment to another. The output process record 64 comprises a process identification data 88; and an active flag 90 indicating that a batch material is waiting to be transferred from one item of equipment to another. The output process record 64 also comprises next equipment type field 92 and a next action field 94. The next equipment type field 92 is arranged to store

data indicating the next item of equipment which is to be utilized to process a batch either in terms of specific equipment identification data 50 equipment type data 52. The next action field 94 is arranged to store process of identification data corresponding to the record within the discrete process records 60 or continuous process records 62 is to be performed after the processing of the batch has been completed or alternatively a null field indicating the processing by the equipment identified by the equipment record is complete.

The output process records 64, enables a specific type of process to be modelled namely storage of a batch within an item of equipment prior to transfer to another item of equipment. As the process comprises waiting for the availability of other equipment the next equipment field 92 implicitly defines the necessary condition complete the output process being modelled. Thus in the case of process modelled by an output process the next equipment type field 92 may be utilised in a similar way to the completion condition data 74 for a discrete 60 or continuous 62 process record as will be described in detail later.

Figure 8 is a schematic block diagram of an exemplary data structure for a utility record 32. In this embodiment each utility record 32 comprises utility type data 100, current quantity data 102, maximum capacity data 103, activation level data 104, generator status data 106, generation rate data 108 and external input data 110.

The utility type data 100 identifies the type of utility to be modelled using the utility record 32. The current quantity data 102 identifies the current amount of utility available. The maximum capacity data 103 comprises data identifying the maximum amount of utility which can be stored, for example in a size of a holding tank for a utility. The activation level data 104 comprises data identifying a level below which the on site utility is to be generated thereby defining a control mechanism to be employed to maximise the availability of the utility. The generation rate data 108 comprises data identifying the rate at which an on site utility may be generated. The external inputs data 110 comprises data identifying required resources when the utility is generated.

In accordance with this embodiment of the present invention where a continuous process record has an active flag 70 indicating that the process is currently occurring the rate determination 82 associated with the continuous process record is utilized to reduce the quantity level 102 of an associated utility corresponding to the input required 76 for that record to reflect the use of a utility within an on-going process. Whenever the quantity level 102 associated with a particular utility type is determined to be beneath the activation level 104 for that utility the generator status 106 is amended to indicate that the utility is to be generated which then causes the current quantity 102 to be updated to account for generation of utility at the generation rate 108 provided required external inputs 110 are available. When the current quantity 102 is equal to the maximum capacity 104 the generation status 106 is amended to indicate that utility is no longer to be generated and the current quantity 102 is no longer increased on the basis of the generation rate 108. Thus in this way the generation and use of utilities can be modelled.

The applicants have also appreciated that the generation of waste by a process can be modelled in the same way in which a utility may be modelled. In particular, just as

the generation and utilisation of a generated utility may be modelled, the available capacity of waste processing can be considered a form of negative utility which is created rather than used up by other processes and which
5 needs to be processed to be removed rather than generated. However, in the same way in which available capacity and lack of available utilities effect the timing of processing in a main production line, similarly the available capacity and lack of available processing
10 capacity of waste processing can also effect the timing of other processes.

Figure 9 is a block diagram illustrating an exemplary data structure for batch data 34 for use in accordance
15 with this embodiment of the present invention. In this embodiment the batch data 34 comprises a plurality of batch records 115 comprising data identifying the content and processing of batches of products as will be described in detail below. The batch data also comprises
20 a next batch pointer 117 indicating which of the batch records 115 is to be utilized as representing the next batch to be processed and a next batch due time 119 indicating when the next batch 117 is to be initiated relative to the current time, as will be described in
25 detail later.

Figure 10 is a schematic block diagram illustrating an exemplary data structure for batch records 115 within the batch data 34. In this embodiment of the present invention the batch records 115 each comprise a batch number 130 enabling the batches to be identified, equipment identification data 132, identifying the equipment ID 50 of an item of equipment processing a particular batch; routing data 134 comprising data indicative of which items of equipment in terms of their equipment ID 50, a particular batch is to be processed by where this is defined in advance; and a set of batch parameters 136 comprising data identifying the product characteristics for example size and volume of package of a product etc., that is processed as part of the batch indicated by the batch record.

As will be described in detail later the batch data 34 is utilized to determine the order in which individual batches represented by the individual batch records 115 are initiated and the processing of batches is then determined by the routing data and batch parameters 134 associated with that batch.

Figure 11 is a schematic block diagram of an exemplary data structure for output record 36 in accordance with

this embodiment of the present invention. In this embodiment the simulation is arranged to record only simulated equipment use and utility availability. It will be appreciated that other data such as quantities of product made or quantities of raw materials consumed could be monitored in addition to the equipment use and utility availability monitored in this embodiment.

In accordance with the present embodiment, the output records each comprise a time field 140 containing data indicating the relative time of the output data relative to the initiation of the model; an equipment in use field 142 comprising a list of equipment identification numbers of equipment having status flags 54 indicating that the equipment is in use at the time indicated within the time field 140 and a list of utility levels comprising the values of the instantaneous quantities of utilities, wastes and products 102 of each of the utility records within the utilities data 32 for the user's activities at the time indicated in the time field. Thus in this way the output data records enables the use and level of utilities for each of the utilities and equipment within a model to be stored for each step throughout the running of a simulation.

The input of data identifying the items of equipment, utilities and batches of product to be simulated prior to simulation of a process will now be described.

5 In this embodiment equipment utilized in a process is modelled in terms of processes which an item of equipment is used for and fundamental physical parameters. Equipment records 31 are generated either by selecting data from a library of predefined records for types of
10 equipment stored on a disk 10 or directly input via the keyboard 5 and mouse 7. In order to facilitate input of equipment data, in some embodiments of the present invention the input module 15 may be arranged to generate a graphical interface for inputting data in a similar
15 manner to that provided by the Extend TM Software provided by ImagineThat Inc.

Figure 12 is an exemplary graphical interface for inputting equipment data. In this example the interface
20 comprises a main input screen 200, to the left of the main input screen 200 is a data entry screen 202 for inputting data for storage as equipment data and to the right is a control screen 203. Also displayed is a pointer 204 which is controlled using the mouse 7.

In this embodiment the main input screen 200 is arranged to display a block diagram of processes undertaken by an item of equipment to be modelled. In this example the equipment to be modelled comprises a chromatography column which is initially filled 210, then eluted 211 and then cleaned 212. The elution 211 also results in output 213.

The data entry screen 202 comprises a parameter entry section 220 and a process edit section 222. The control screen 203 comprises a new button 230, a previous button 232, and a next button 234 used for navigations between a data entry for different items of equipment, an add button 236 and an end button 238.

In use, initially a user selects utilizing the mouse 7 and the pointer the new button 230 which causes a new equipment record to be generated in which the main input screen is blank. Selecting the add button 236 causes a new block to appear within the main input screen 200. Blocks displayed in the main input screen 200 can then be selected using the pointer. If a block is selected the block may be edited to enter a name for example fill, elute etc corresponding to the process the block represents. If two blocks are selected a line is shown

connecting the blocks to indicate which processes follows one another.

5 Selecting a block also cause the process edit section 222
of the data entry screen 202 to display type,
requirement, rate and time data associated with a block
to be displayed. This data can then be edited by
selecting the portion of the process edit section 222 to
be changed and inputting new data via the keyboard 5.
10 Thus in this way by entering data each process is
associated with data for storage as a process record 60-
64. In a similar way equipment type data 52 and physical
parameter data 55 can be entered using the parameter
entry section 220 for the equipment being modelled.
15 Equipment data for other items of equipment can be
entered by selecting the next or previous buttons 232.
When parameters for all items of equipment have been
entered a user can select the end button 238 which causes
all of the entered data to be stored in the form of
20 equipment records.

The data for batch data records and utilities records are
then entered using other interfaces in a similar manner
which will not be described in detail here. Thus in this

way the processing of specific equipment for a defined set of batches is input.

After equipment records 31, utilities records 32 and batch data 34 have been input using the input module 15 of the modelling program within the memory 11 a simulation of an industrial process may be created using the modelling module 17 utilizing the input data. The processing of modelling module 17 in accordance with an embodiment of the present invention will now be described with reference to Figures 13, 14, 15A and 15B.

In accordance with this embodiment of the present invention, the modelling module 17 repeatedly utilises and updates the modelling data 19 in order to simulate the processing of an industrial process. As a result of the modification of modelling data 19 by the modelling module 17 output data indicative of the use of equipment within the simulation and instantaneous levels of available utilities modelled within the simulation are generated.

Figure 13 is a flow diagram illustrating the processing of the modelling module 17 to generate output data for a step within a simulated process. Initially (S1) the

modelling module 17 determines whether the next batch due data 119 in the batch data 34 is equal to zero indicating that a new batch is to be initiated. If this is the case the modelling module 17 then (S2) determines the greatest
5 previous cycle time 68 currently associated with an equipment record 31. This maximum cycle time is then stored in the memory 11.

The modelling module 17 then (S3) determines minimum
10 cycle times for processing the next batch by each of the items of equipment which are to be simulated. This is achieved by the modelling module 17 calculating for each item of equipment the sum of times associated with completion conditions 74 for each of the discrete process
15 records 60 and continuous process records 62 for an item of equipment where the completion conditions 74 are either fixed or dependent upon batch parameters 136 for the batch record having a batch identification number 130 corresponding to the next batch pointer 117. Thus in
20 this way a minimum cycle time for each item of equipment for processing the batch is determined in which the processing of a batch is not delayed in any way by external constraints such as the availability of utilities.

The modelling module 17 then causes the equipment identification data 132 associated with the batch record having a batch number 130 corresponding to the next batch pointer 117 to be set equal to the equipment identification number 50 for initially processing that batch and sets the active flag 70 for the first process of the processes associated with the equipment record having the equipment identification number 50 for the first item of equipment to process the batch to indicate that the process is now active. The modelling module 17 then updates the next batch pointer 117 to be equal to the batch number 130 of the next batch record of the plurality of batch records 115 and sets as the next batch due value 119 a value corresponding to the greater of either the maximum cycle time of the current model or the determined minimum cycle time for the initiated batch throughout which ever is greater.

By calculating an initial next batch being due value equal to the greater of either the current maximum cycle times for equipment within the model or the minimum cycle time necessary to process the latest batch but a means is provided to ensure that the processing of the newly initiated batch is completed by simulated equipment within the model before the next batch is started

throughout the simulation. The calculated scheduling of batches in this manner thus ensures that at no point within the simulation, two batches initiated at different times are combined within the same item of equipment and hence enables the modelling of industrial microbiological processes to be undertaken.

After the modelling module 17 has initiated if a new batch is due or if the modelling module 17 determines that no new batch is due, the modelling module 17 then determines (S5) a suitable timing increment or step size for generating output data as will now be described with reference to Figure 14.

Figure 14 is a flow diagram of the processing of the modelling module 17 determining a time period for use in updating the output data for a simulated process. Initially the modelling module 17 generates (S10) a list of active processes being list of equipment identification numbers 50 and process identification numbers 69 of discrete and continuous process records 60, 62 having data 70 indicating that those processes are currently active. The modelling module 17 then appends to the list data indicative of the utility records 32

having associated generator status 106 indicating that utility is currently being generated.

5 The modelling module 17 then determines a minimum time increment required to fulfil the completion conditions for or each of the active discreet processes in the generated list. In this embodiment this is achieved by the modelling module 17 initially selecting as a suitable time increment a time increment corresponding to the next
10 batch due time 119 for the bath data 34. The modelling module 17 then determines for the first of the discreet processes in the list of generated list of active processes the difference between the time active data 72 for the corresponding process record and the time
15 required to fulfil the completion condition 74 for that record. If this is less than the next batch due time 119 this time difference is then stored as the current minimum time increment for the model. The modelling module 17 then proceeds to determine a calculated time
20 difference for the next active process on the list of processes and substitute this time difference if it is shorter than the currently stored minimum time difference. This is repeated for each of the active processes on the list and in this way the minimum time

•

5

10

15

20

25

Returning to Figure 13, after a suitable time increment has been selected (S5) the modelling module 17 then (S6)

updates the next batch due data 119 to account for the selected time increment. The modelling module 17 then updates (S7) the modelling data 19 within the memory 11 utilising the selected time increment as will now be described in detail with reference to Figures. 15A, B and C.

Figures. 15A, 15B and 15C are a flow diagram of the processing of the modelling module 17 for updating modelling data 19 after a suitable time increment has been determined.

Initially (S20) the modelling module 17 determines which items of equipment are currently in use. In this embodiment this is achieved by the modelling module 17 generating a list of equipment identification numbers 50 corresponding to equipment records in which at least one process corresponding to either a discrete process record 60 or a continuous process record 62 has a active status 70 indicating that the item of equipment is undertaking some process.

Thus for example in this embodiment for a particular process for a set of batches in which two fermentation vessels, two storage vessels, a centrifuge, a

chromatography column where water for injection is measured are utilized the following might be an extract from a set of output records.

	TIME	EQUIPMENT IN USE	WFI LEVEL
5	1000	Fermentation Vessel 1, Fermentation Vessel 2 Chromatography column	Water = 100
10	1010	Fermentation Vessel 1, Centrifuge Chromatography column	Water = 100
15	1011	Fermentation Vessel 1, Centrifuge Chromatography column	Water = 99
20	1012	Fermentation Vessel 1 Centrifuge Chromatography column	Water = 98
25	1013	Fermentation Vessel 1 Centrifuge Chromatography column	Water = 97

1033 Fermentation Vessel 1
 Centrifuge
 Chromatography column Water = 97

5 In this way output data which can subsequently be displayed in the form of a GANT chart or a graph of available quantity of modelled utility is generated.

10 It will of course be appreciated that other data could be stored for example data indicative of instantaneous demand for a utility within a model. Alternatively further data for example data indicative of the simulated processes being undertaken by an item of equipment, or initiation and progress of individual batches could also
15 be stored.

20 The modelling module 17 then (S21) generates a new output data record 36 comprising time data 140 corresponding to the time data 140 of the last output record generated incremented by the selected time increment; equipment in use data 142 comprising the generated list of equipment in use, and utility quantity data 144 comprising a list of utility type 100 and current utility quantity 102 for each of the utility records 32 stored in memory.

The modelling module 17 then (S22) causes the current cycle time data 66 associated with each equipment record having equipment identification data 50 corresponding to the list of items of equipment in use to be incremented by the value corresponding to the selected time increment.

Thus, in this way, the levels of model utilities and the times at which modelled items equipment are in use are stored as output data and the current cycle time data 66 for each equipment record is updated to indicate the additional time in use of each item of equipment.

The modelling module 17 then proceeds to utilise the list of active processes previously generated (S10) and stored in memory to update the data within the discrete process record 60 and continuous process record 62 and utility records 36 to simulate the action occurring in the model over the selected time period, as will now be described.

The modelling module 17 initially (S23) selects the first of the active processes within the list of active processes stored in memory 11. The modelling module 17 then (S19) determines whether the inputs required corresponding to the input data 76 for the process record

are currently available, for example, where the quantity of a utility necessary for a process is above a certain threshold. If this is determined not to be the case the process is not simulated the modelling module proceeds to
5 determine (S31) whether the process currently under consideration is the final active process.

If the modelling module 17 determines that the necessary inputs are available for a process, the modelling module
10 17 then determines (S25) whether the current process being updated comprises a continuous process. If this is the case, the modelling module 17 then proceeds (S26) to update the utility quantity 102 corresponding to the required input 76 for the process by decrementing the
15 current quantity 102 for the utility required indicated by the input data 76 by an amount calculated by multiplying the selected time increment by the rate determination data 82 for that utility. Thus, in this way, whenever a continuous process utilising a utility is
20 modelled, the demand for utilities are also modelled in a way in which an approximation of instantaneous demand for utility can be determined.

After updating any utility records (S26) if necessary the
25 modelling module 17 then (S27) determines whether the

completion condition 74 for the process currently under consideration has been fulfilled.

Thus, for example, where the completion condition 74 comprises an amount of time necessary to complete a process, the modelling module 17 compares the time active data 72 for the process with the completion condition 74 to determine whether the process is complete. Alternatively, where a completion condition 74 comprises the completion of another process or the availability of some item of equipment or equipment having a specified equipment type, the determination (S22) of whether the completion condition 74 is fulfilled would comprise determinations of status data 54 of appropriate equipment records or active data 70 of process records.

If the modelling module 17 determines (S27) that the completion condition has not yet been fulfilled, the modelling module 17 then proceeds to determine whether the process currently under consideration is the last process (S31) as will be described later. If the modelling model 17 determines (S27) that the completion condition 74 for the process currently under consideration has been fulfilled, the modelling module 17 then (S28) causes the active flag 70 and time active 72

for the current process to be reset to indicate that the process is no longer taking place and causes the active flag 70 on the record corresponding to the next action 80 within the current process to be set to indicate that
5 that process is to be initiated.

Where the next action 80 of a process which is determined to be complete corresponds a null value, the process which is currently being simulated comprises the final
10 process which takes place within an item of equipment. Where such an active process is completed, the modelling module 17 then (S29) determines whether any other process is occurring within the item of equipment which is being modelled. If this is not the case, the completion of the
15 current process is indicative of the equipment no longer being in use. The modelling module 17 then proceeds to change the status data 54 for the item of equipment which the process currently under consideration forms a part to indicate that the equipment is no longer in use and sets
20 the previous cycle time 68 for that item of equipment equal to the current cycle time 66 and then resets that current cycle time to zero.

Thus in this way whenever it is determined that no
25 processes are occurring within a simulation of an item of

equipment, the status data associated with that item of equipment and the current cycle time data 66 are reset to indicate that the equipment is inactive whilst the previous cycle time data 68 is made to reflect the time taken from the initiation of activity within the equipment to its completion for the last time that the equipment corresponding to the equipment was in use.

After the status and cycle time data of an item of equipment which has ceased to be in use has been amended (S30) or if the process under consideration is either determined not to be complete (S27) or the inputs necessary for the process (S24) are determined not to be available, the modelling module 17 then (S31) determined whether the current process under consideration comprises the final process in the list of processes in memory. If this is not the case, the modelling module 17 then selects (S32) the next process within the list of actual processes in memory and then proceeds to determine whether the inputs are available to continue the nearly selected process (S24).

Thus in this way the simulation of processes utilising equipment is simulated for the predetermined time period for each of the active processes within the simulation

and equipment and utilities data is amended to reflect the actions taking place as a result of the process steps. At the same time, the cycle times for each item of the equipment are monitored so that the maximum cycle
5 time for equipment within a processing line can be determined and the scheduling of new batches through the simulation selected so as to ensure that queues do not develop within the simulation.

10 If the process currently under consideration is determined to be the last in the list of active processes stored in memory 11 the modelling module 17 then (S33) generates a list of output records having an active flag
90 indicating that the processes of the output process
15 records 64 are currently awaiting to be completed. The modelling module 17 then (S34) selects the first of the records on the generated list and then (S35) determines whether the status of equipment within the model is such that the output process may be completed.

20

In this embodiment this is achieved by the modelling module 17 initially identifying the batch record 115 having the equipment identification number 132 corresponding to the equipment identification number 50
25 of the equipment record containing the output process

record 64 currently under consideration. The modelling module 17 then determines whether the routing data 134 of the selected batch record 115 specifies a particular item of equipment to which the batch under consideration is to be routed. If this is the case then the modelling module 17 then determines whether the status data 54 of the identified equipment record 31 to which the batch is to be directed is currently inactive. Alternatively if the batch record 115 does not specify a particular item of equipment to which a batch is to be routed then the modelling module 17 utilises the next equipment type data 92 for the output process record 64 currently under consideration to determine which items of equipment the current batch may be routed to and then determines whether the status data 54 of equipment records 31 corresponding to the requirements of the next equipment type data 92 indicates that any item of equipment fulfilling the requirements of the next equipment type data 92 is currently inactive.

If the modelling module 17 determines that the current status data 54 for an equipment record 31 corresponding to an item of equipment to which a batch may be routed indicates that the item of equipment is inactive the modelling module 17 then (S36) updates the output process

record 64 currently under consideration by amending the active flag 90 to indicate that the process is no longer continuing and then initiates the next process in the available equipment by altering the status data 54 of the equipment record 31 corresponding to the next item of equipment being used to indicate that the equipment is now active and also causing the active flag 70 of the first process of the process of records 60, 62 for that equipment record 31 to be set to indicate that the first process is about to be undertaken.

The modelling module 17 then (S37) determines whether the equipment record 31 containing the output process 64 currently under consideration which has just be completed is now no longer undertaking any process. This is achieved by the modelling module 17 determining whether any of the discrete process records 60 or continuous process records 62 for the equipment record 31 containing the current output process record 64 have active flags 70 indicating that the process is within the equipment are currently active. If no discrete 60 or continuous 62 processes are active the completion of the output process under consideration would have resulted in the equipment used for the output process to now be available for use once again. The modelling module 17 then (S38) causes

the status data 54 for the equipment record 31 containing the output process record 64 currently under consideration to be updated to indicate that the equipment is now no longer in use and sets the previous cycle time data 68 to be equal to the current cycle time data 66 before resetting the current cycle time data 66 to zero. Since the new availability of a further item of equipment can effect the possible completion of other output processes, in accordance with this embodiment of the present invention the modelling module 17 then generates a new list of output processes (S33) so that the possible fulfilment of those all output processes may be considered once again.

If it is determined (S35) that the equipment available necessary to complete the output process currently under consideration is not available or the completion of an output process does not result in an item of equipment becoming free for use (S37), the modelling module 17 proceeds to determine (S39) whether the output process currently under consideration is the last active process in the generated list of output processes.

If this is not the case, the modelling module 17 proceeds (S40) to select the next output process record for

consideration as to whether the equipment for completing the next process is available for use (S35). If the current output process is the final process in the list of output processes generated by the modelling module 17
5 the processing of the modelling module for the step of the model currently being simulated then ends.

After the simulation has been completed the computer 1 will have stored in memory 11 output data 140-144 which
10 can be output either as a graph or as a table and displayed on the display 3 or printed out in hard copy from utilizing the printer 8. By varying the batch and utilities records 32, records 120, equipment records 31 utilizing the input module 15, a number of different
15 simulations can be performed to identify how the variation of parameters effects the simulation and resulting output data. Actual equipment for performing a process can the be selected and the scheduling of batches performed in accordance to the equipment 31 and
20 utility 32 records and batch records 120 respectively with the equipment and schedules being such as to correspond to a simulation whose use of equipment is determined to represent an efficient process.

Although the embodiments of the invention described with reference to the drawings comprise computer apparatus and processes performed in computer apparatus, the invention also extends to computer programs, particularly computer programs on or in a carrier, adapted for putting the invention into practice. The program may be in the form of source or object code or in any other form suitable for use in the implementation of the processes according to the invention. The carrier be any entity or device capable of carrying the program.

For example, the carrier may comprise a storage medium, such as a ROM, for example a CD ROM or a semiconductor ROM, or a magnetic recording medium, for example a floppy disc or hard disk. Further, the carrier may be a transmissible carrier such as an electrical or optical signal which may be conveyed via electrical or optical cable or by radio or other means.

When a program is embodied in a signal which may be conveyed directly by a cable or other device or means, the carrier may be constituted by such cable or other device or means.

Alternatively, the carrier may be an integrated circuit in which the program is embedded, the integrated circuit being adapted for performing, or for use in the performance of, the relevant processes.

CLAIMS:

1. A method of simulating an industrial process comprising the steps of:

5 storing model data indicative of a plurality of processes involving a number of items of equipment to be used in an industrial process to be simulated;

determining scheduling data for initiating batches against which said processes are to be simulated; and

10 generating output data indicative of a simulation of an industrial process utilising said stored model data and said scheduling data,

characterised in that said determination of scheduling data comprises the steps of:

15 determining a minimum possible processing time for each item of equipment involved in simulated processing of an initiated batch in accordance with said model data;

determining for batches currently being processed the greatest time of use of items of equipment utilised in processing said batches; and

20 generating scheduling data for scheduling the initiation of the next batch after said initiated batch, said scheduling data being such to cause the time between an initiated batch and said next batch within said simulation to be equal to the greater of the maximum of

25

said minimum process times for said items of equipment and said greatest time of use for said items of equipment.

5 2. A method in accordance with claim 1, wherein said determination of the greatest time of use of an item of equipment utilised in processing comprises the steps of:

10 storing in association with each item of equipment to be simulated data indicative of the time of use of said item of equipment for a batch previously processed by said item of equipment; and

 determining as the greatest time of use the greatest time of use of said stored times of use.

15 3. A method in accordance with claim 1, wherein said determining of the greatest time of use of an item of equipment further comprises for each of the said items of equipment the steps of:

20 determining whether an item of equipment is in use; and if an item of equipment is in use determining the total time the item of equipment has been in use for a current batch; and if an item of equipment is no longer in use storing said total time in use as said time in use for said equipment.

25

4. A method in accordance with claim 3, wherein each of said items of equipment is associated with a number of processes wherein said determination of whether an item of equipment is in use comprises determining whether any of said processes associated with said item of equipment is currently being simulated.

5. A method in accordance with any preceding claims, wherein said determining of a minimum possible processing time of an initiated batch comprises the step of storing in association with each batch to be initiated data indicative of the greatest of said minimum possible processing times; and said generation step comprises utilising said data to generate scheduling data.

6. A method in accordance with any of claims 1-4, wherein said determination of a minimum possible processing time comprises the steps of:

associating with a batch to be initiated data to be indicative of the items of equipment to be utilised in simulated processing of said batch; and

determining said minimum possible processing times for each item of equipment associated with said batch.

7. A method in accordance with claim 6, wherein each of

the said items of equipment is associated with a number of processes, each of said processes having associated therewith a completion condition, at the least some of said completion conditions comprising the lapse of specified time period in the simulation of a process, wherein said determination of a minimum possible processing time for an item of equipment comprises determining the sum of said specified time periods for said processes of said items of equipment.

8. A method in accordance with claim 7, wherein said storage step further comprises associating with at least some of said plurality of processes involving said items of equipment, rate data and said generation of output data comprises for each step in a simulation the steps of:

determining whether any process of said plurality of processes to be simulated is associated with rate data;

determining the minimum time increment required to complete any of the processes currently being simulated; and

selecting as a step size for generating output data a default step size, if at least one process associated with rate data is to be simulated and said default step size is smaller than said determined minimum time

increment, and selecting as said step size said
determined minimum time increment if no process to be
simulated is associated with rate data or said default
step size is greater than said determined minimum time
5 increment.

9. A method of simulating an industrial process
comprising the steps of:

storing model data indicative of a plurality of
10 processes involving a number of items of equipment to be
used in an industrial process to be simulated;

determining a time increment to be used with said
model data; and

generating output data indicative of a step within
15 a simulation of an industrial process utilising said
stored model data and said determined step size,
characterised in that said storage step comprises the
step of storing rate data in relation to at least some of
said processes, and

20 that said determination step comprises for each step
in a simulation; the steps of:

determining whether any process of said plurality of
processes to be simulated is associated with rate data;

determining the minimum time increment required to
25 complete any of the processes currently being simulated;

and

selecting as a step size for generating output data a default step size, if at least one process associated with rate data is to be simulated and said default step size is smaller than said determined minimum time increment, and selecting as said step size said determined minimum time increment if no process to be simulated is associated with rate data or said default step size is greater than said determined minimum time increment.

10. A method in accordance with claim 8 or claim 9, wherein said storage step further comprises associating with said at least some of said plurality of processes, utility type data, and said generation of output data comprises for steps in a simulation generating output data associated with items of utility type data utilizing rate data associated with a process being simulated and said determined step size.

11. A method in accordance with claim 10, wherein said generation of output data comprises for steps in a simulation determination of output data representative of instantaneous demand for a utility corresponding to an item of utility type data utilizing determined sums of

rate data associated with said utility type data for processes being simulated.

5 12. A method in accordance with claim 10 or claim 11, wherein said generation of output data for steps within a simulation comprises storing in association with items of utility data, quantity data indicative of a current quantity of a utility within a simulation wherein said quantity data is determined utilizing rate data
10 associated with processes being simulated and said determined step size.

15 13. A method in accordance with claim 12, wherein said quantity data for a step in a simulation is determined by incrementing or decrementing quantity data associated with utility type data for the previous step in a simulation by the product of said determined step size and the sum of rate data associated with said utility data and processes being simulated.

20 14. A method in accordance with claim 13, wherein said storage step further comprises storing in association with said items of utility type data, minimum quantity data and generation rate data, wherein the determination
25 of quantity data associated with an item of utility type

data for a step within a simulation comprises the step of incrementing or decrementing quantity data for the previous step in a simulation by the product of said generation rate data and said determined step size if said quantity data is less than said minimum quantity data associated with said utility type.

15. A method in accordance with claim 14, wherein said storage step further comprises storing in association with said items of utility type data, maximum quantity data wherein the determination of quantity data associated with an item of utility type data for a step within a simulation comprises the step of incrementing or decrementing quantity data for the previous step in a simulation by the product of said generation rate data and said determined step size only when said quantity data associated with said utility type does not exceed said maximum quantity data associated with said utility type.

16. A method in accordance with any of claims 10 to 15, wherein said generated output data associated with utility type data comprises data indicative of the simulated availability of utilities or waste processing capacity.

17. A method in accordance with any preceding claim,
wherein said storage step comprises storing in
association with at least some of said plurality of
processes, data indicative of a continuation condition,
5 and said generation of output data comprises for each
step in a simulation, the steps of:

determining which of said plurality of processes are
to be simulated in said step of said simulation;

10 determining for processes to be simulated associated
with data indicative of a continuation condition whether
output data generated for the previous step in said
simulation fulfils the continuation condition defined by
said data; and

15 if a continuation condition for a process being
simulated is not fulfilled simulating a delay in the
continued processing of said process.

18. A method of simulating an industrial process
comprising the steps of:

20 storing model data indicative of a plurality of
processes involving a number of items of equipment to be
used in an industrial process to be simulated; and

generating output data indicative of a simulation of
an industrial process utilizing said stored model data,
25 characterised in that said storage step comprises storing

in association with at least some of said plurality of processes, data indicative of a continuation condition, and said generation of output data comprises for each step in a simulation, the steps of:

5 determining which of said plurality of processes are to be simulated in said step of said simulation;

 determining for the processes to be simulated associated with data indicative of a continuation condition whether output data generated for the previous
10 step in said simulation fulfils the continuation condition defined by said data; and

 if a continuation condition for a process being simulated is not fulfilled simulating a delay in the continued processing of said process.

15

19. A method in accordance with claim 17, when directly or indirectly dependent upon claim 12, wherein said data indicative of a continuation condition comprises data defining an equation which quantity data associated with
20 utility type data is to fulfill.

20. A method in accordance with claim 17 or 19, when directly or indirectly dependent upon claim 7, wherein said storage step comprises storing data in association
25 with each of said plurality of processes indicative of

the next processes to be simulated following the completion of each said process wherein said determination of which of said plurality of processes are to be simulated comprises the steps of:

5 determining for each process simulated in the previous step of a simulation whether the completion condition associated with each said process has been fulfilled; and

10 determining as processes to be simulated processes for which said completion conditions have not been fulfilled and said next processes associated with processes for which said completion conditions have been fulfilled.

15 21. A method of performing an industrial process comprising the steps of:

 simulating an industrial process in accordance with any preceding claim to determine apparatus required to perform a process;

20 providing apparatus corresponding to said items of equipment simulated; and

 utilizing said apparatus to perform said industrial process simulated.

25 22. An apparatus for generating a simulation of an

industrial process comprising:

storage means for storing model data indicative of a plurality of processes involving a number of items of equipment to be used in an industrial process to be simulated;

determination means for determining scheduling data for initiating batches against which said processes are to be simulated; and

generation means for generating output data indicative of a simulation of an industrial process utilising stored model data and determined scheduling data,

characterised in that said determination means comprises:

means for determining a minimum possible processing time for each item of equipment involved in simulated processing of an initiated batch in accordance with stored model data;

means for determining for batches currently being processed the greatest time of use of items of equipment utilised in processing said batches; and

means for generating scheduling data for scheduling the initiation of the next batch after an initiated batch, said scheduling data being such to cause the time between an initiated batch and said next batch within a

simulation to be equal to the greater of the maximum of said determined minimum process times for said items of equipment and said determined greatest time of use for said items of equipment.

5

23. An apparatus in accordance with claim 22, wherein said means for determining the greatest time of use of an item of equipment comprises:

10

means for storing in association with each item of equipment to be simulated data indicative of the time of use of said item of equipment for a batch previously processed by said item of equipment, said means for determining the greatest time of use being arranged to determine as the greatest time of use the greatest time of use of said stored times of use stored in said means for storing.

15

20

24. An apparatus in accordance with claim 22, wherein said means for determining of the greatest time of use of an item of equipment is arranged to determine for each of the said items of equipment whether an item of equipment is in use; and if an item of equipment is in use to determine the total time the item of equipment has been in use for a current batch; and if an item of equipment is no longer in use to store said total time in use as

25

said time in use for said equipment.

25. An apparatus in accordance with claim 24, wherein
said storage means is arranged to store model data
5 associating each of said items of equipment with a number
of processes wherein said means for determining the
greatest time of use of an item of equipment being
arranged to determine whether any of said processes
associated with an item of equipment is currently being
10 simulated to determine whether an item of equipment is in
use.

26. An apparatus in accordance with any of claims 22 to
25, wherein said means for determining a minimum possible
15 processing time comprises means for storing in
association with each batch to be initiated data
indicative of the greatest of said minimum possible
processing times, said determination means being arranged
to utilize said data to generate scheduling data.

20
27. An apparatus in accordance with any of claims 22 to
25, wherein said means for determining a minimum possible
processing time comprises: means for associating with a
batch to be initiated data indicative of the items of
25 equipment to be utilised in simulated processing of said

batch, said means for determining a minimum possible processing times being arranged to utilize said data associated with said batch.

5 28. An apparatus in accordance with claim 27, wherein
said storage means is arranged to associate said items of
equipment with data indicative of a number of processes
each of said processes having associated therewith a
completion condition, at the least some of said
10 completion conditions comprising the lapse of specified
time period in the simulation of a process, wherein said
means for determining a minimum possible processing time
for an item of equipment is arranged to determine the sum
of said specified time periods for said processes of said
15 items of equipment.

29. An apparatus in accordance with claim 28, wherein
said storage means is further arranged to associate with
at least some of said plurality of processes, rate data
20 and wherein said generation means further comprises:

means for determining whether any process of said
plurality of processes to be simulated is associated with
rate data;

means for determining the minimum time increment
25 required to complete any of the processes currently being

simulated; and

selection means for selecting as a step size for generating output data a default step size, if at least one process associated with rate data is to be simulated and said default step size is smaller than said determined minimum time increment, and selecting as said step size said determined minimum time increment if no process to be simulated is associated with rate data or said default step size is greater than said determined minimum time increment.

30. An apparatus for generating a simulation of an industrial process comprising:

storage means for storing model data indicative of a plurality of processes involving a number of items of equipment to be used in an industrial process to be simulated;

means for determining a time increment to be used with said model data; and

generation means for generating output data indicative of a step within a simulation of an industrial process utilising said stored model data and a determined step size, characterised in that said storage means is arranged to store rate data in relation to at least some of said processes, and

that said means for determining a time increment comprises:

means for determining whether any process of said plurality of processes to be simulated is associated with rate data;

means for determining the minimum time increment required to complete any of the processes currently being simulated; and

selection means for selecting as a step size for generating output data a default step size, if at least one process associated with rate data is to be simulated and said default step size is smaller than said determined minimum time increment, and selecting as said step size said determined minimum time increment if no process to be simulated is associated with rate data or said default step size is greater than said determined minimum time increment.

31. An apparatus in accordance with claim 29 or claim 30, wherein said storage means is further arranged to associate with said at least some of said plurality of processes, utility type data, and said generation means is arranged to output data associated with items of utility type data utilizing rate data associated with a process being simulated and said determined step size.

32. An apparatus in accordance with claim 31, wherein said generation means is arranged to output data representative of instantaneous demand for a utility corresponding to an item of utility type data utilizing
5 determined sums of rate data associated with said utility type data for processes being simulated.

33. An apparatus in accordance with claim 31 or claim 32, wherein said storage means is arranged to store in
10 association with items of utility data, quantity data indicative of a current quantity of a utility within a simulation, and wherein said generation means is arranged to output quantity data is determined utilizing rate data associated with processes being simulated and said
15 determined step size.

34. An apparatus in accordance with claim 31, wherein said generation means is arranged to determine quantity data for a step in a simulation by incrementing or
20 decrementing quantity data associated with utility type data for the previous step in a simulation by the product of said determined step size and the sum of rate data associated with said utility data and processes being simulated.

35. An apparatus in accordance with claim 34, wherein said storage means is further arranged to store in association with said items of utility type data, minimum quantity data and generation rate data, wherein said generation means is arranged to output quantity data associated with an item of utility type data for a step within a simulation by incrementing or decrementing quantity data for the previous step in a simulation by the product of said generation rate data and said determined step size if said quantity data is less than said minimum quantity data associated with said utility type.

36. An apparatus in accordance with claim 35, wherein said storage means is further arranged to store in association with said items of utility type data, maximum quantity data wherein said generation means is arranged to output quantity data associated with an item of utility type data for a step within a simulation determined by incrementing or decrementing quantity data associated with said utility type for the previous step in a simulation by the product of said generation rate data and said determining step size only when said quantity data associated with said utility type does not exceed said maximum quantity data associated with said

utility type.

37. An apparatus in accordance with any of claims 22 to 36, wherein said storage means is arranged to store in association with at least some of said plurality of processes, data indicative of a continuation condition, and said generation means comprises:

means for determining which of said plurality of processes are to be simulated in said step of said simulation; and

means for determining for processes to be simulated associated with data indicative of a continuation condition whether output data generated for the previous step in said simulation fulfils the continuation condition defined by said data; and if a continuation condition for a process being simulated is not fulfilled simulating a delay in the continued processing of said process.

38. An apparatus for simulating an industrial process comprising:

storage means for storing model data indicative of a plurality of processes involving a number of items of equipment to be used in an industrial process to be simulated; and

generation means for generating output data indicative of a simulation of an industrial process utilizing said stored model data, characterised in that said storage means is arranged to store in association with at least some of said plurality of processes, data indicative of a continuation condition, and said generation means comprises:

means for determining which of said plurality of processes are to be simulated in said step of said simulation;

means for determining for the processes to be simulated associated with data indicative of a continuation condition whether output data generated for the previous step in said simulation fulfils the continuation condition defined by said data; and if a continuation condition for a process being simulated is not fulfilled simulating a delay in the continued processing of said process.

39. An apparatus in accordance with claim 37, when directly or indirectly dependent upon claim 31, wherein said storage means is arranged to store data indicative of a continuation condition comprises data defining an equation which quantity data associated with utility type data is to fulfill.

40. An apparatus in accordance with claim 37 or 39, when directly or indirectly dependent upon claim 28, wherein said storage means is adapted to store data in association with each of said plurality of processes indicative of the next processes to be simulated following the completion of each said process wherein said means for determining of which of said plurality of processes are to be simulated comprises the steps of:

means for determining for each process simulated in the previous step of a simulation whether the completion condition associated with each said process has been fulfilled; and

means for determining as processes to be simulated processes for which said completion conditions have not been fulfilled and said next processes associated with processes for which said completion conditions have been fulfilled.

41. A recording medium, storing computer implementable processor steps for performing a method in accordance with any of claims 1 to 20.

42. A recording medium storing computer implementable processor step for generating within a programmable computer an apparatus in accordance with any of claims 22

to 40.

43. A recording medium in accordance with claim 41 or claim 42 comprising a computer disc.

5

44. A recording medium in accordance with claim 41 or claim 42, comprising an electric signal transferred via the Internet.

10

45. A computer disc in accordance with claim 43, wherein said computer disc comprises an optical, magneto-optical or magnetic disc.

15

46. An apparatus for generating a simulation of an industrial process substantially as herein described with reference to the accompanying drawings.

20

47. A method of simulating an industrial process substantially as hereinbefore described with reference to the accompanying drawings.

ABSTRACT

**METHODS AND APPARATUS FOR
SIMULATING INDUSTRIAL PROCESSES**

5

In order to design and implement industrial processes in an efficient manner, an apparatus (1) is provided which can simulate a process to be implemented. The processing of the simulation is controlled by a modelling module (17) and is arranged to cause the constraints on scheduling batches in the simulation to correspond to the constraints in actual processing where mixing of batches initiated at different times is avoided. This is achieved by the modelling module (17), whenever a batch is initiated in the simulation, scheduling the following batch to be initiated, the greatest of either the maximum time items of equipment require to process the batch initiated if no delays occur within the system or the greatest time for processing batches of items equipment currently in use.

10

15

20

(Figure 2)

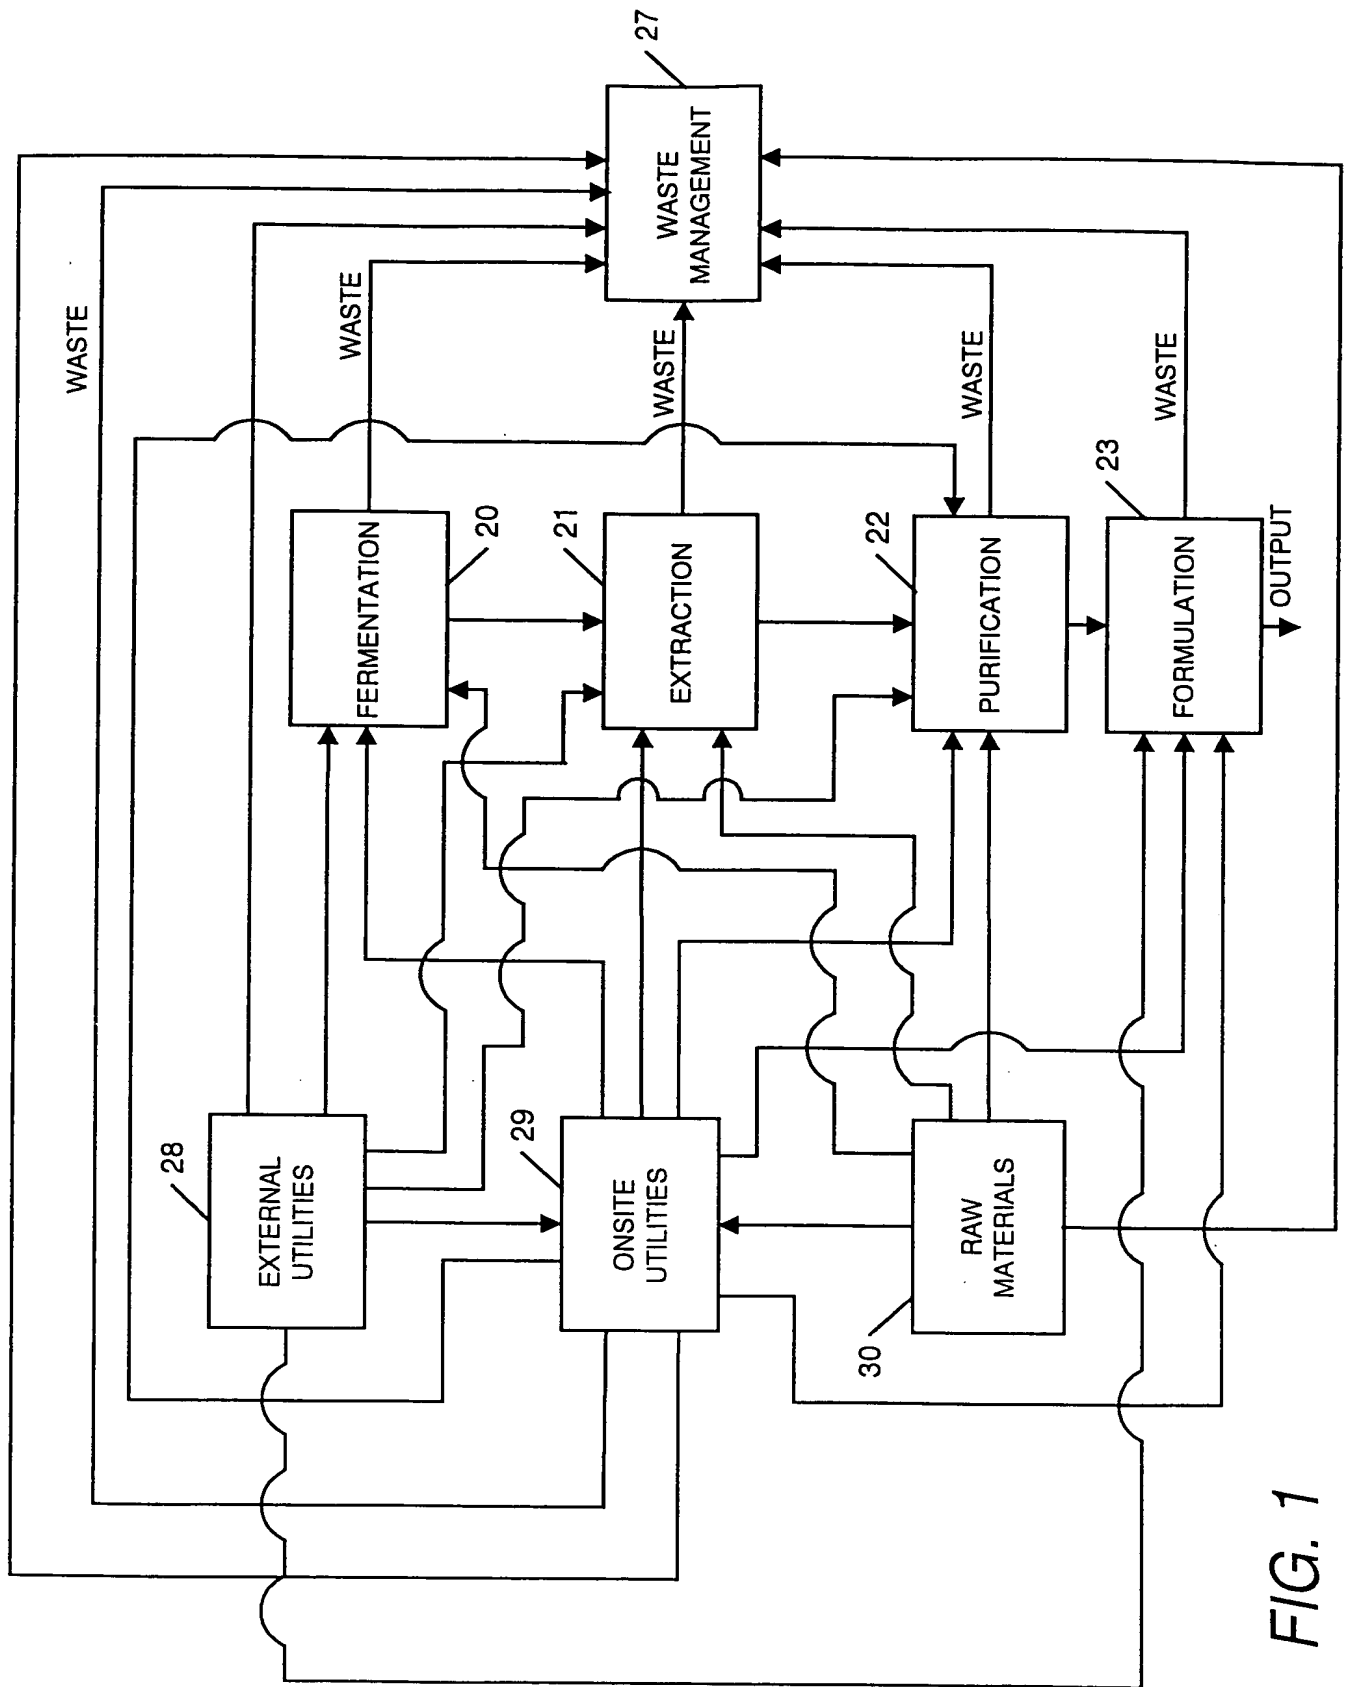
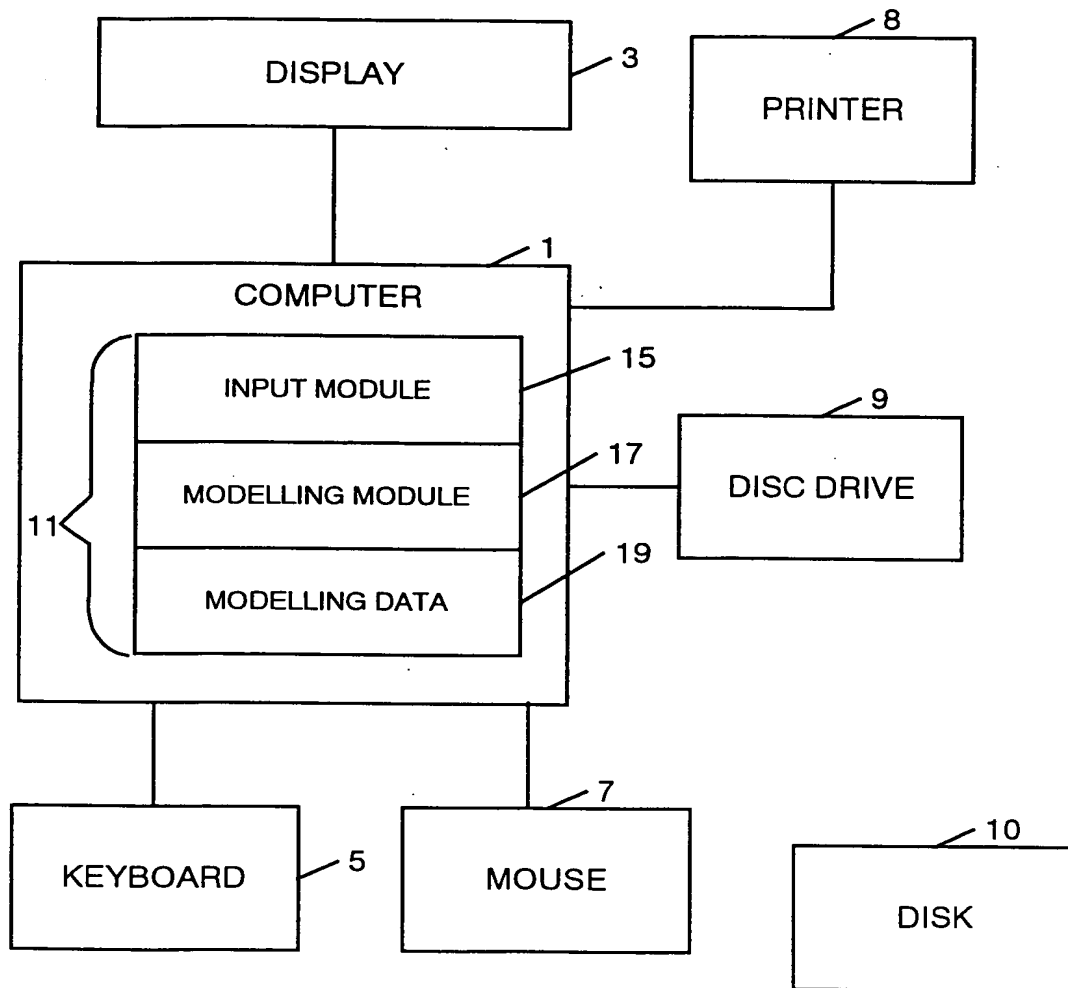


FIG. 1

THIS PAGE BLANK (USPTO)

*FIG. 2*

THIS PAGE BLANK (USPTO)

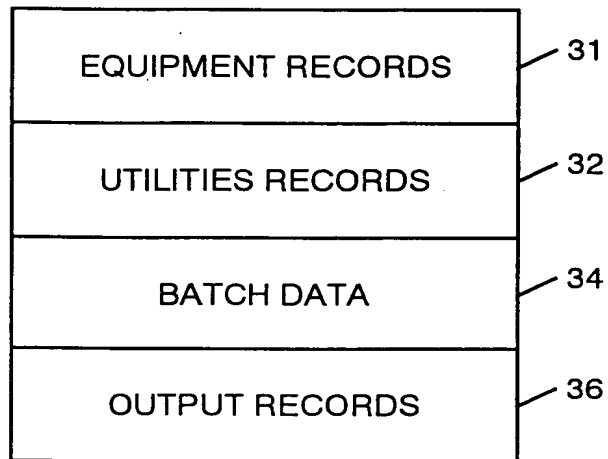
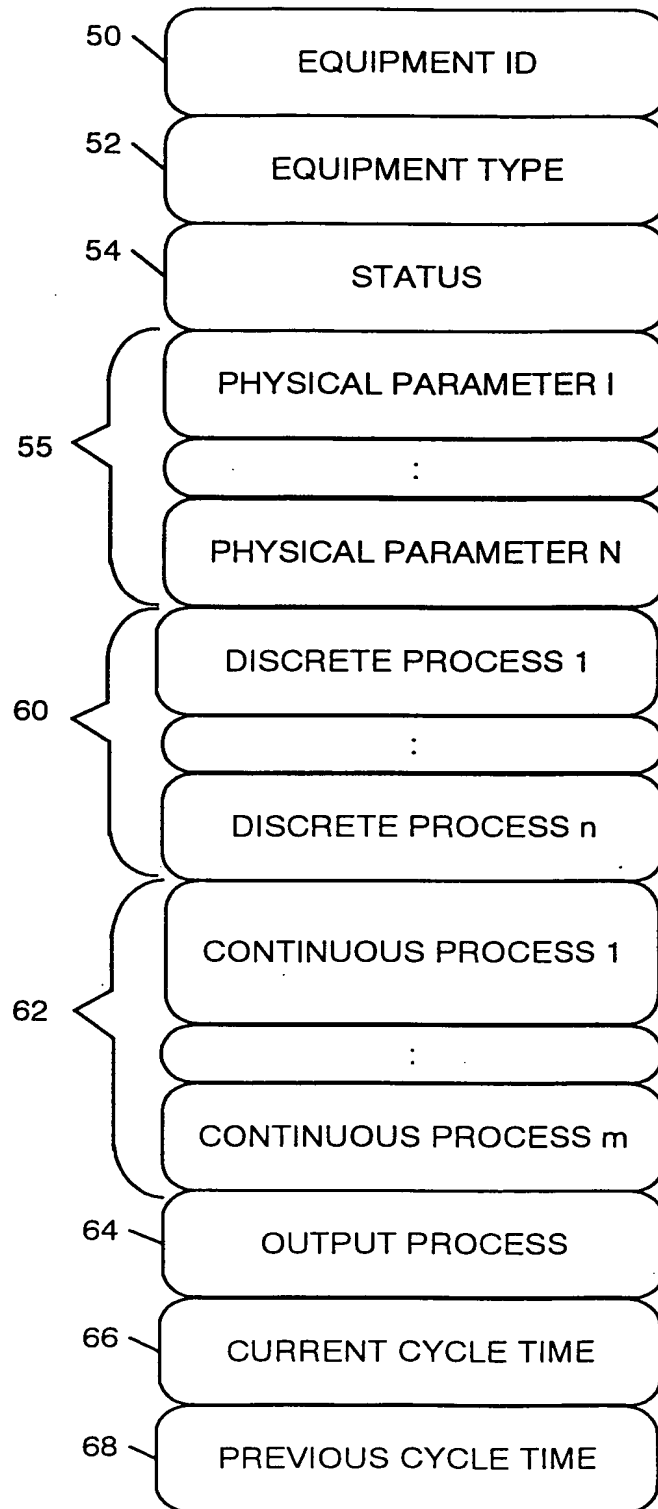


FIG. 3

THIS PAGE BLANK (USPTO)

*FIG. 4*

THIS PAGE BLANK (uspto)

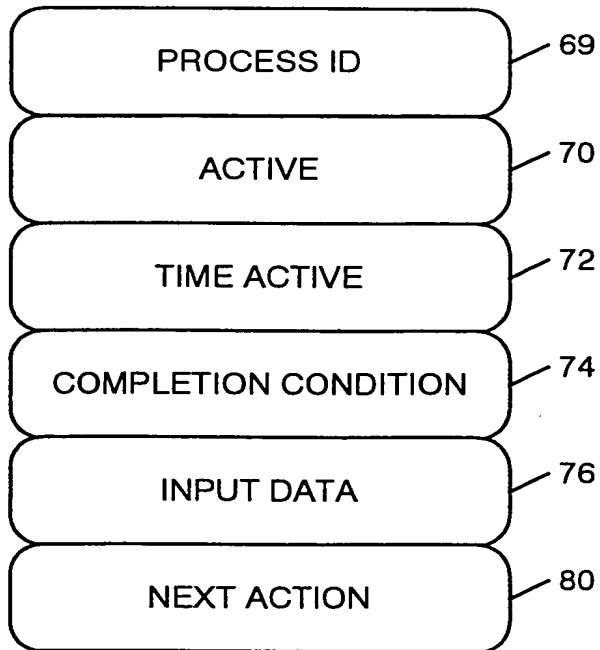


FIG. 5

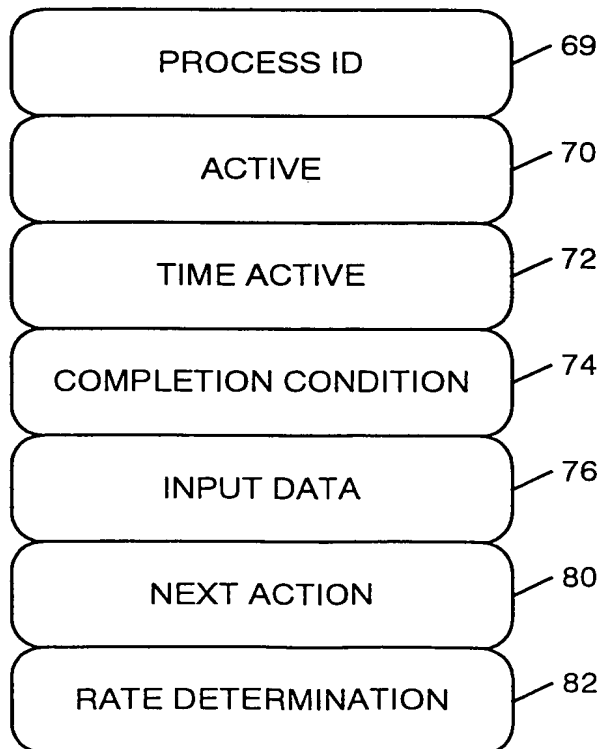


FIG. 6

THIS PAGE BLANK (U3PT0)

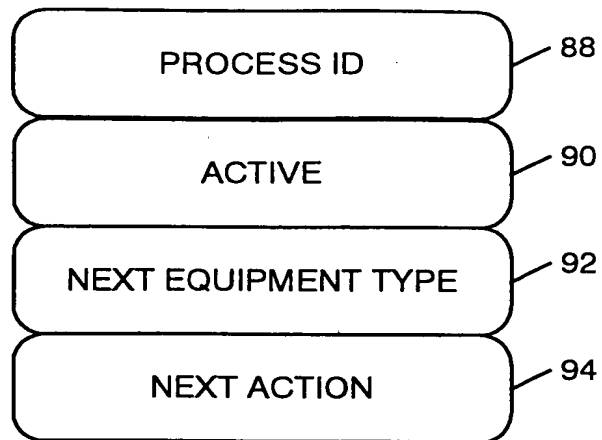


FIG. 7

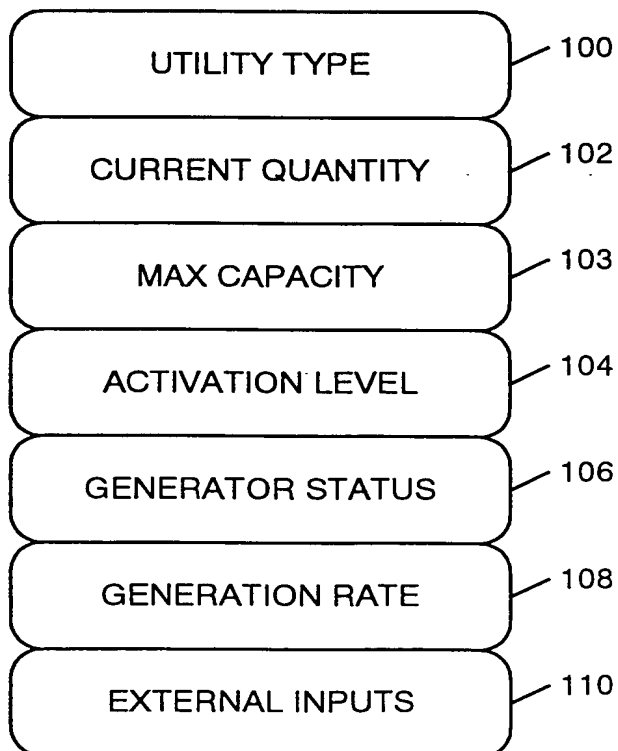
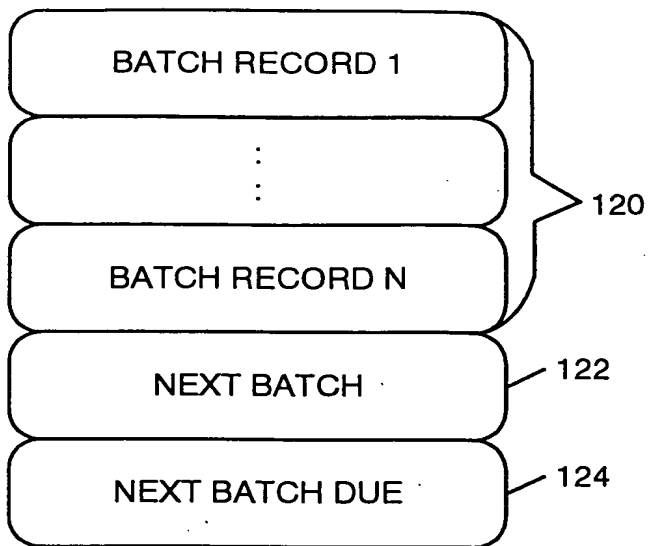
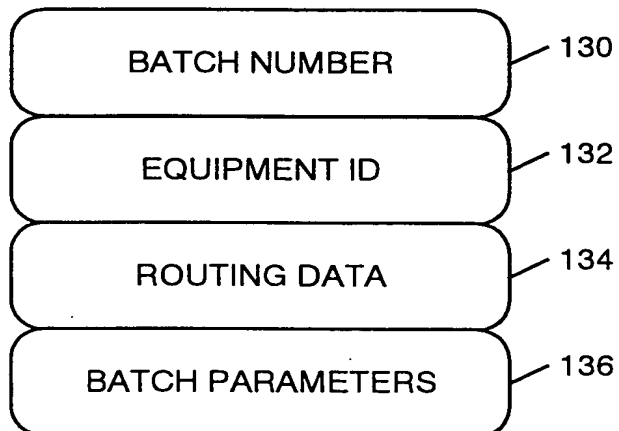
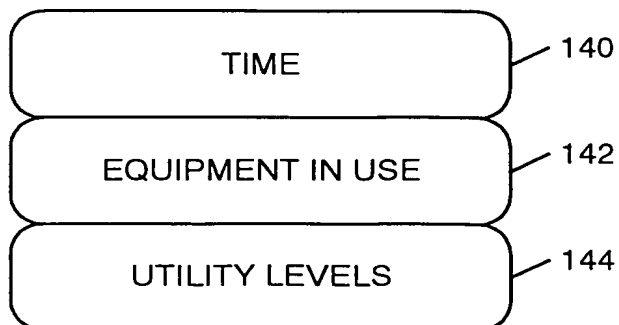


FIG. 8

THIS PAGE BLANK (USPTO)

*FIG. 9**FIG. 10**FIG. 11*

THIS PAGE BLANK (USPTO)

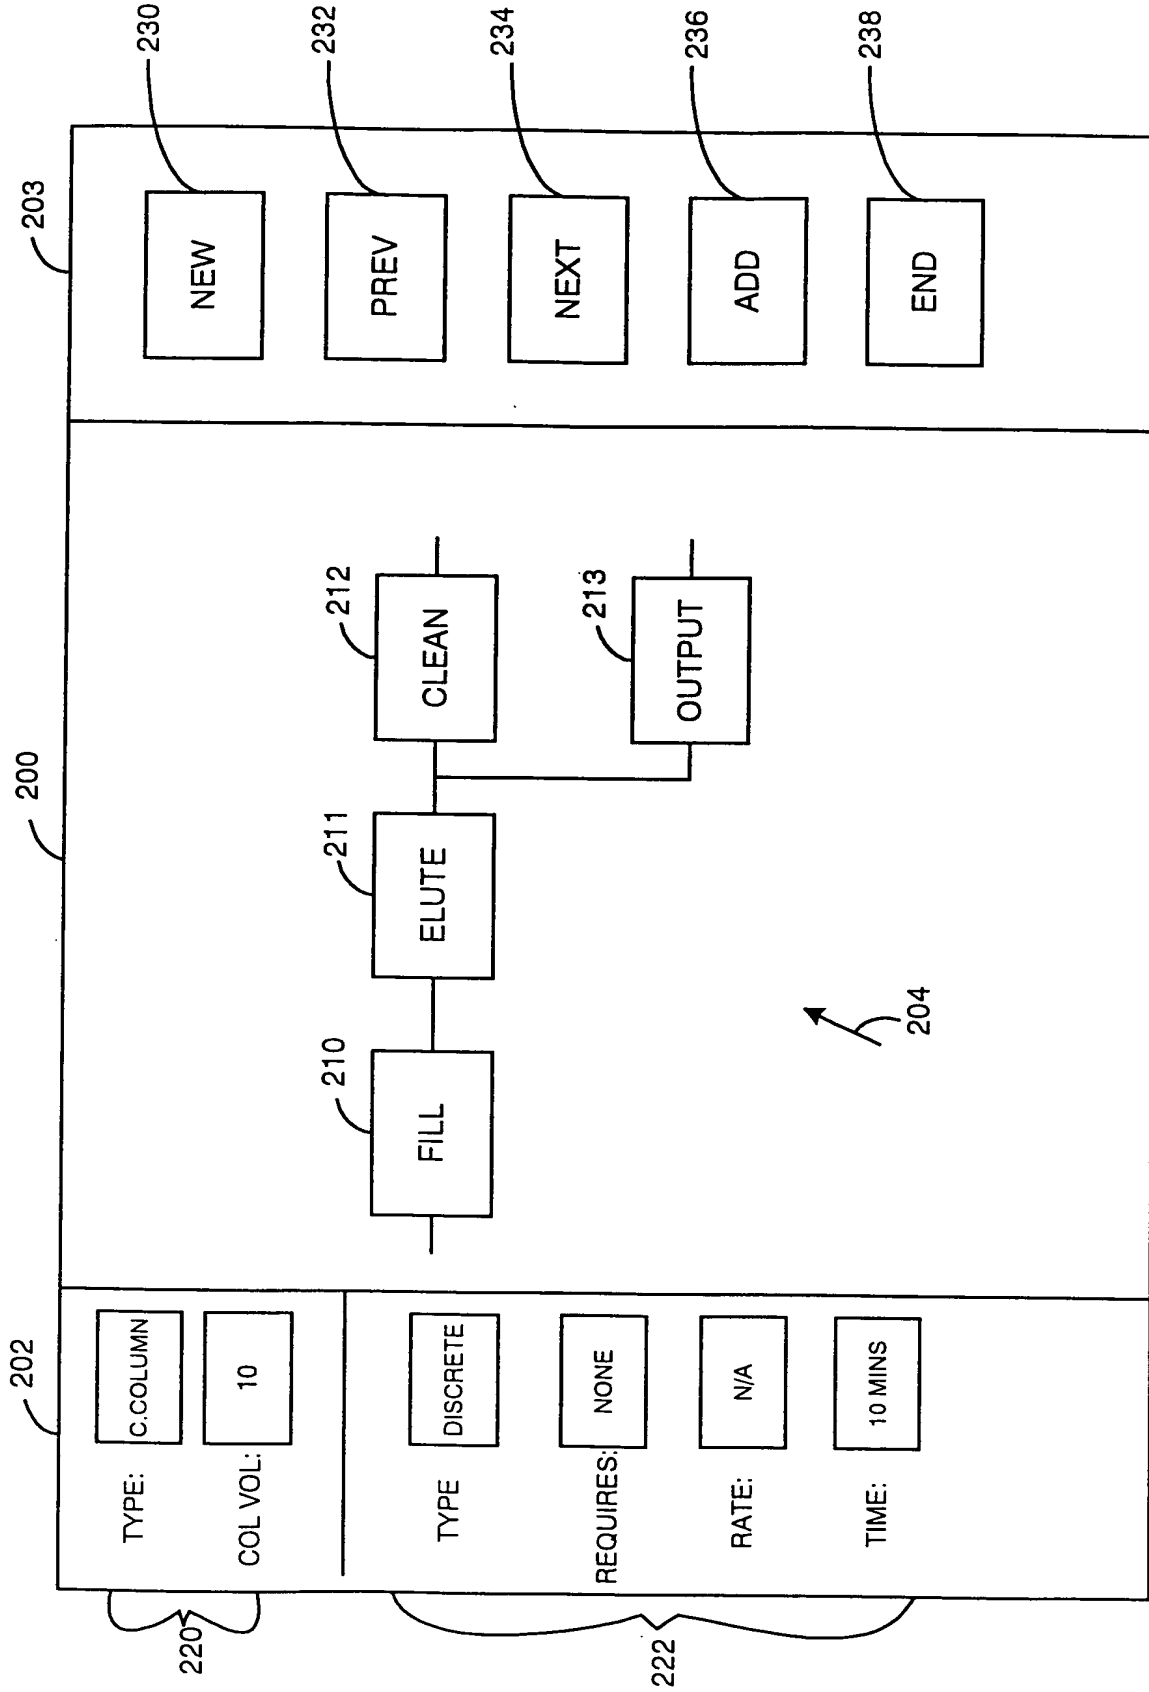
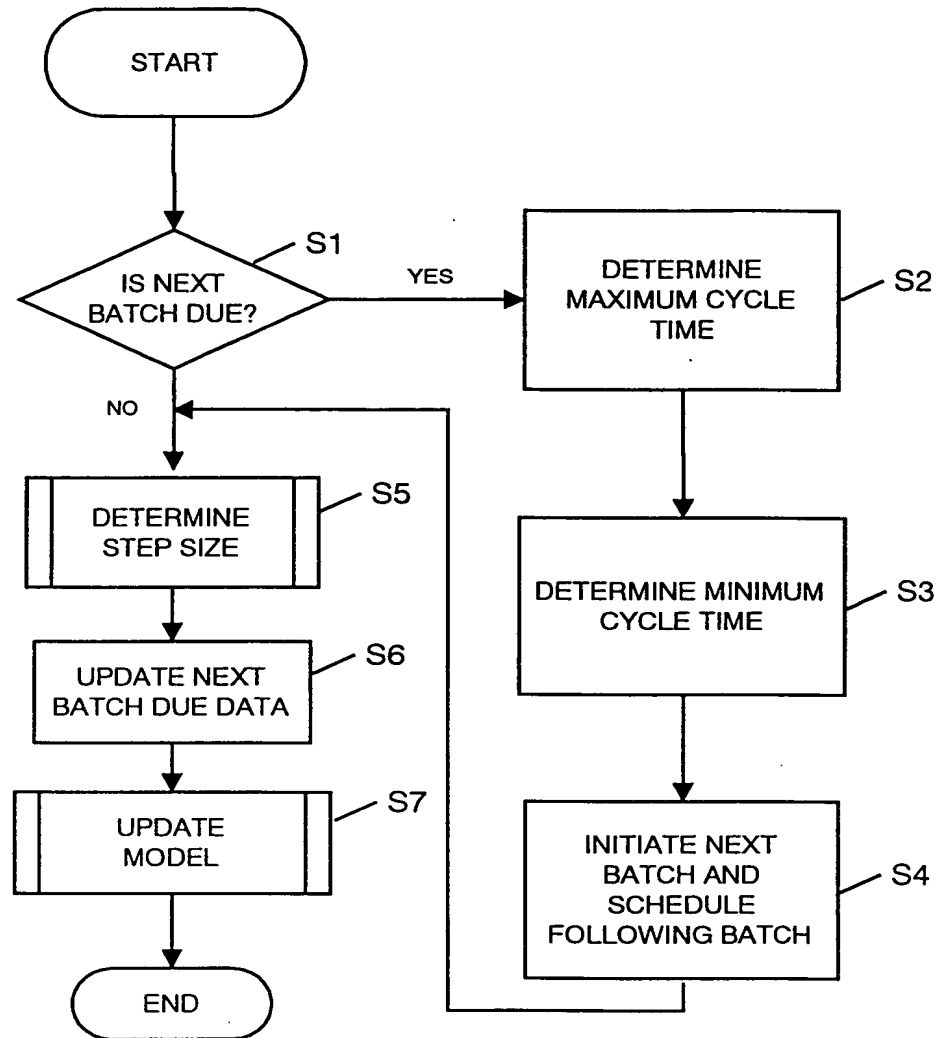


FIG. 12

THIS PAGE BLANK (USPTO)

**FIG. 13**

THIS PAGE BLANK (USPTO)

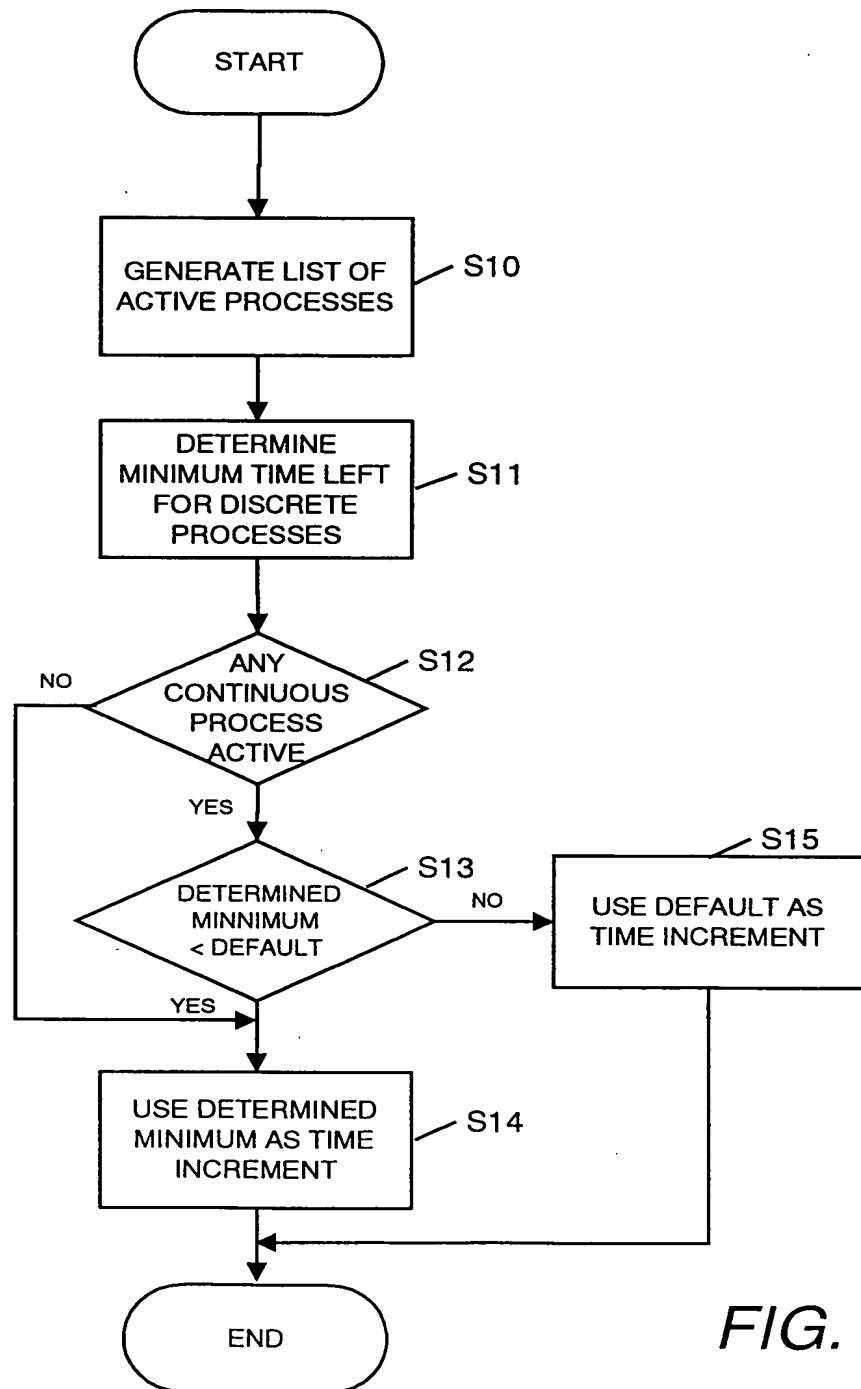
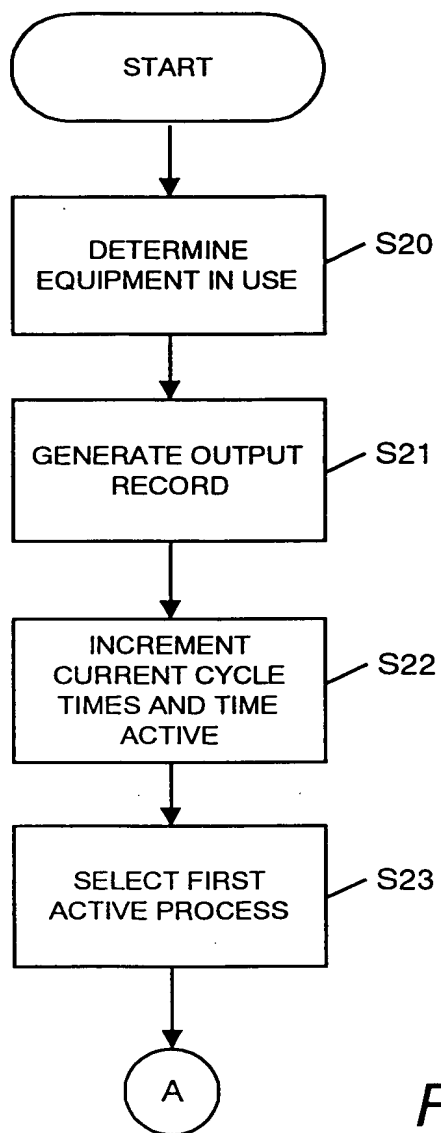


FIG. 14

THIS PAGE BLANK (USPTO)

*FIG. 15A*

THIS PAGE BLANK (USPTO)

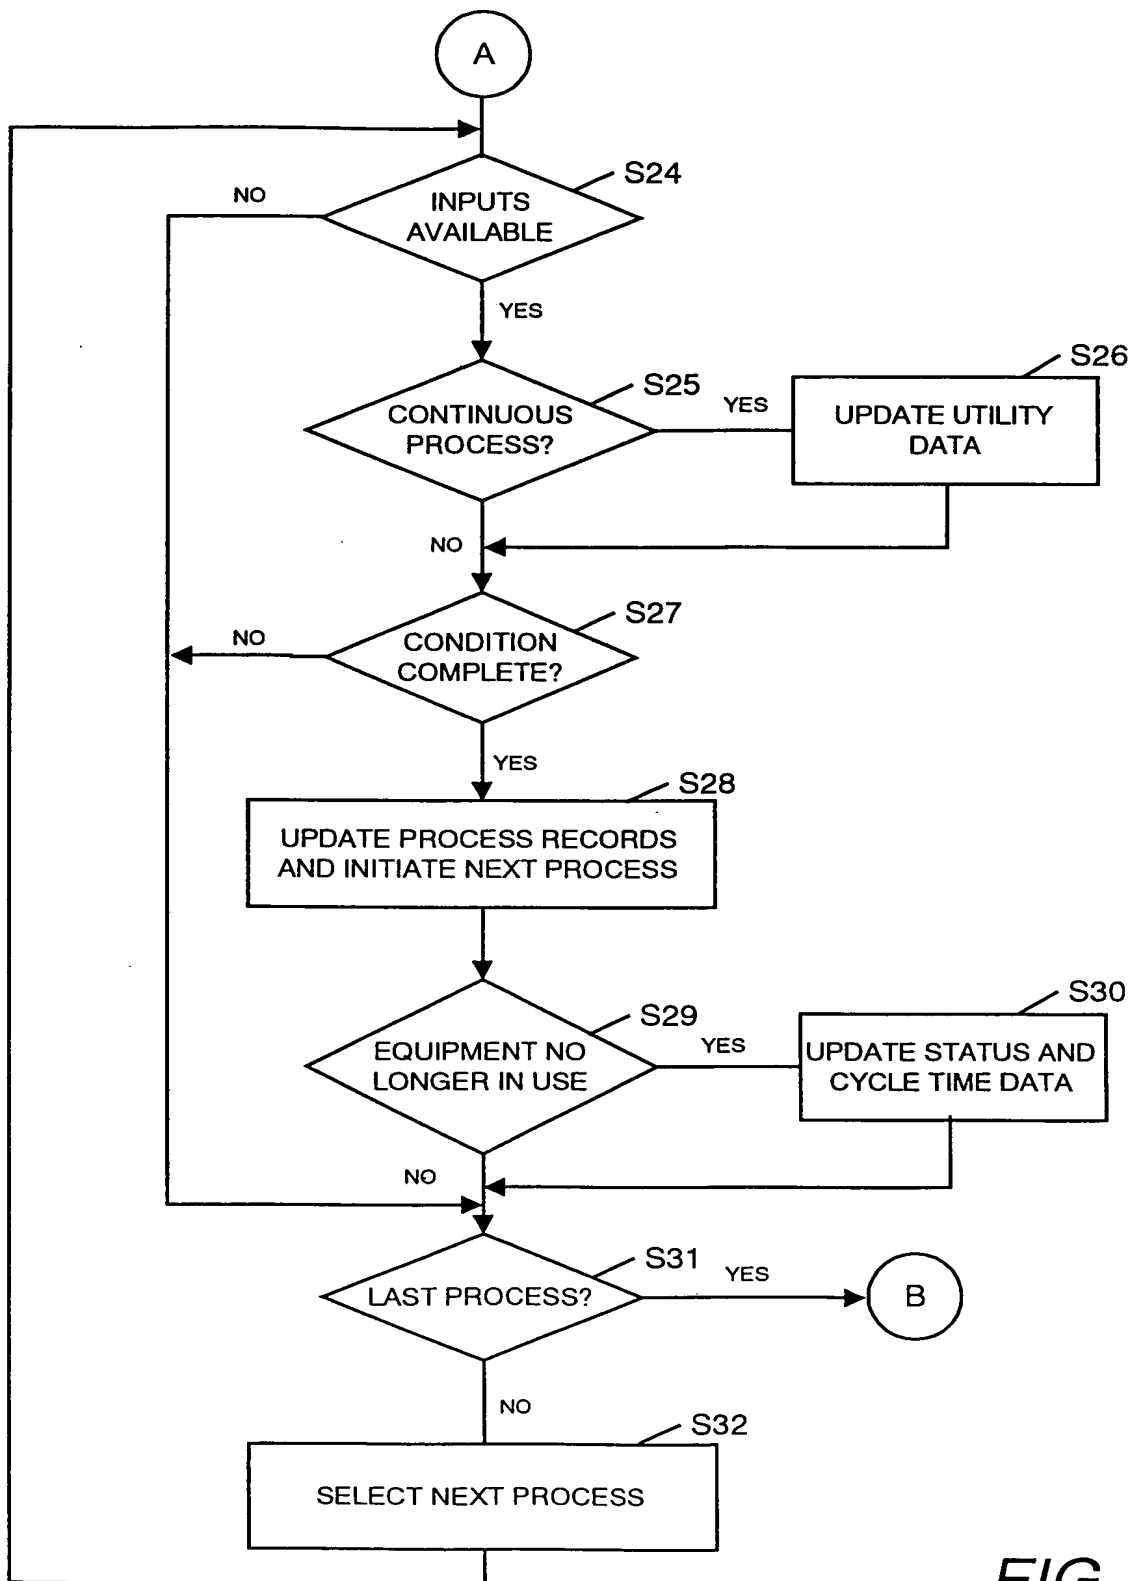


FIG. 15B

THIS PAGE BLANK (USPTO)

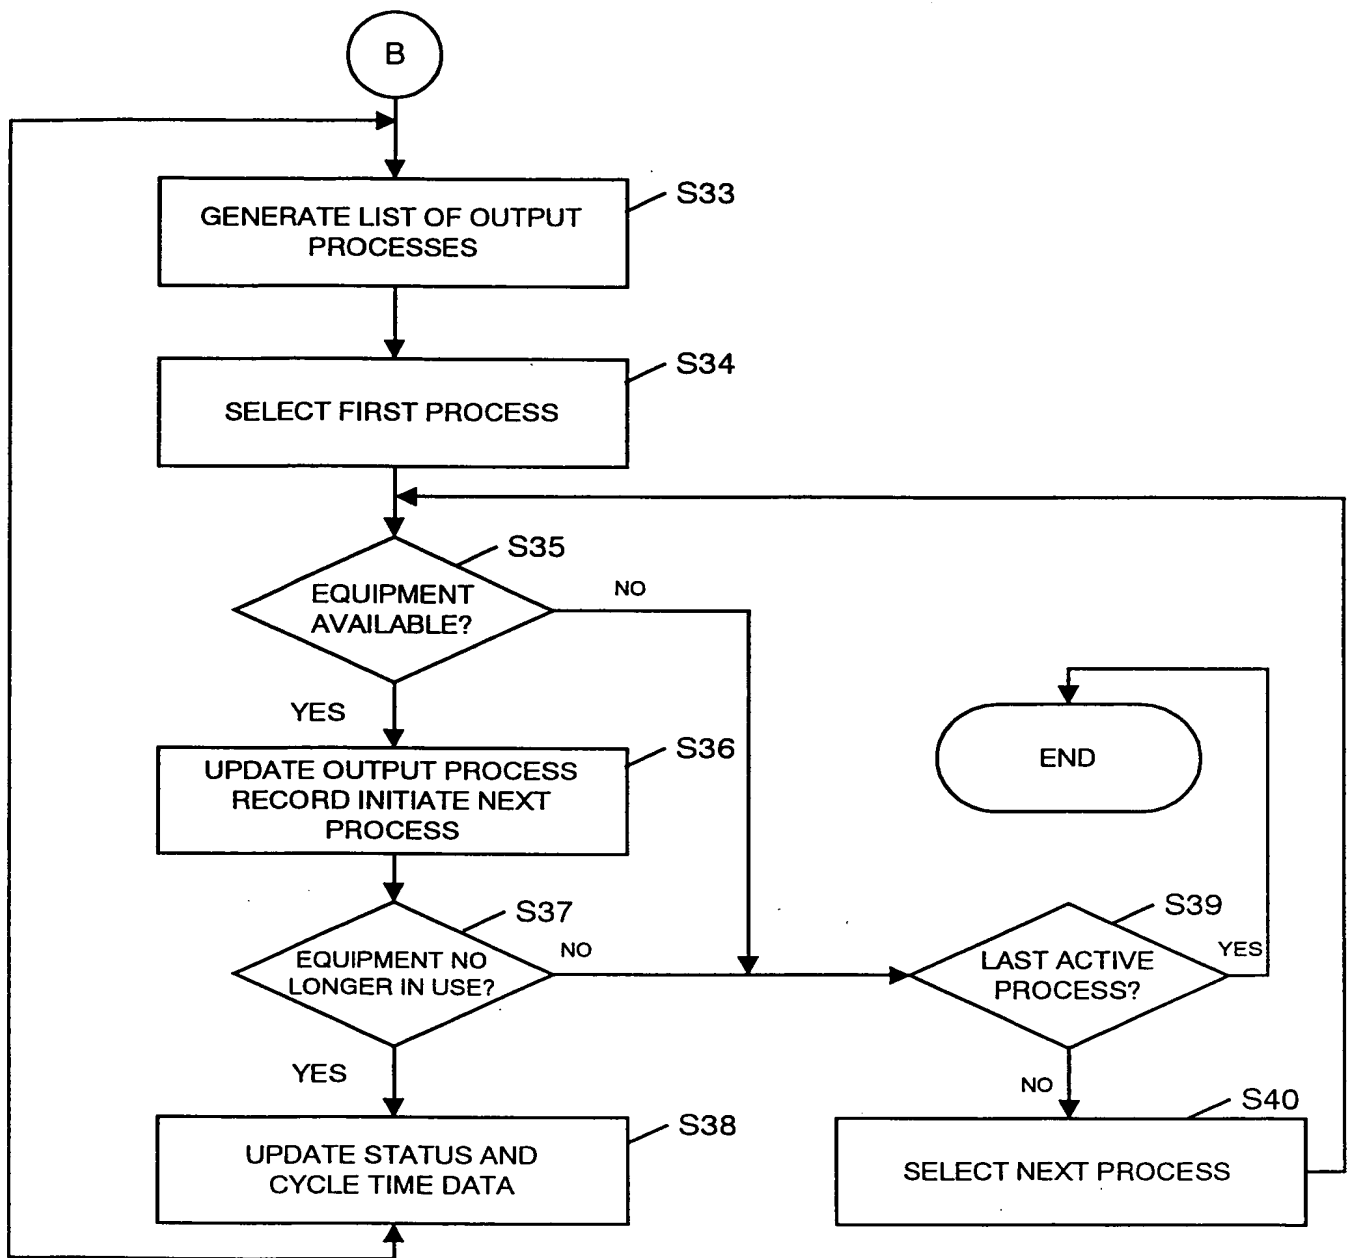


FIG. 15C

THIS PAGE BLANK (USPTO)

FINNEGAN, HENDERSON, FARABOW,
GARRETT & DUNNER, L.L.P.
1300 I Street, N.W.
Washington, D.C. 20005
202/408-4000

SERIAL NO:

09/858, 235

DOCKET NO:

08364. 0017